
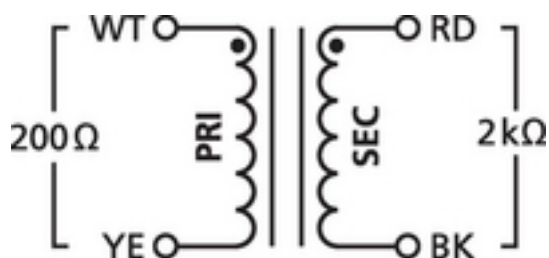


NTE-1 - Audio Transformer

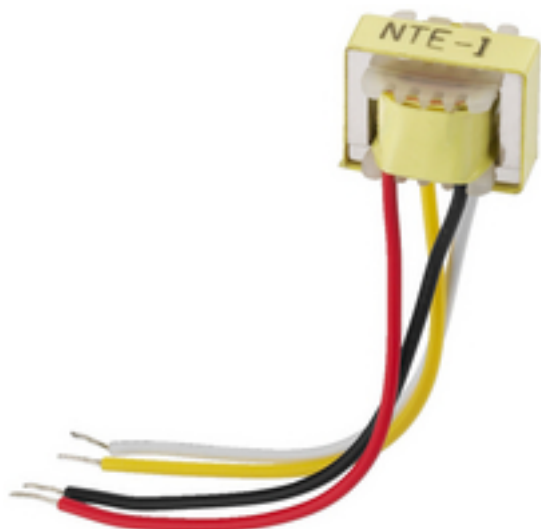

Audio transformer 1:1 for microphone signals, from NEUTRIK.

- Very compact design, e.g. also suitable for installation into connector housings
- Unshielded version with bare wire connections (70 mm)
- Wideband version
- Balance adjustment
- Galvanic isolation to avoid/eliminate hum loops
- Max. input voltage: 550 mV (1% THD/50 Hz)

When installing unshielded transformers into units with interference fields (e.g. power transformers), attention has to be paid to respective shielding measures.

Tekniset tiedot:

| | |
|-----------------------|-------------------------------|
| Description | : transformer |
| Frequency range | : 20-20,000Â Hz |
| Control range | : - |
| Control frequencies | : - |
| Input signal | : 50 mV |
| Input sensitivity | : - |
| Input impedance | : 200 Ohm |
| Output signal | : - |
| Output impedance | : 2 kOhm |
| Gain | : - |
| Phantom power | : - |
| Compression | : - |
| Gate ratio | : - |
| Crossover frequency | : - |
| High-pass filter | : - |
| Low cut | : - |
| Transmission ratio | : 1:1 |
| S/N ratio | : - |
| Channel separation | : - |
| THD | : - |
| Admiss. ambient temp. | : - |
| Power supply | : - |
| Dimensions | : 14 x 11 x 12Â mm(w/o cable) |
| Weight | : 6 g |
| Inputs | : - |
| Outputs | : - |
| Other features | : - |
| Width | : 14 mm |
| Height | : 11 mm |
| Depth | : 12 mm |
| Length | : - |
| Rack spaces, RS | : - |
| Weight | : 6.1 g |