
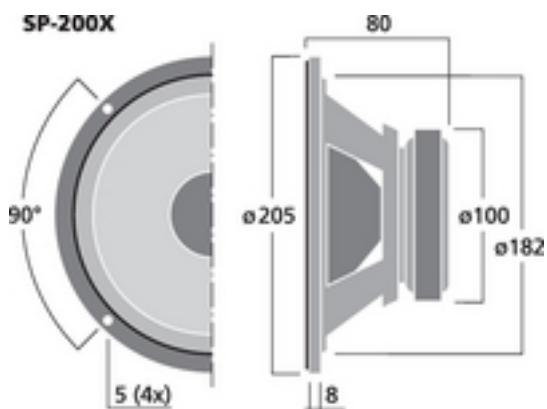


SP-200X - PA Dual Cone

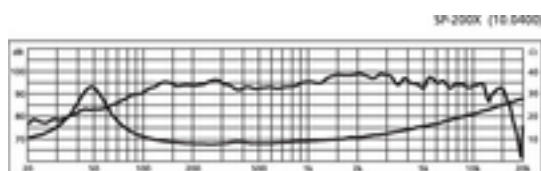

Hi-fi full range speaker, 35 W, 8 Ohm

- One-piece rubber gasket
- Very good linearity
- High efficiency
- For PA systems of special sound requirements or in large column speakers

HOBBY HiFi 01/2012

“The SPH-200X impresses with an excellent sound quality.”

Tekniset tiedot:

| | |
|---|---------------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : f3-15,000 Hz |
| Resonant frequency (fs) | : 50 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 35 W |
| Peak music power output (MAX) | : 70 W |
| Sensitivity | : 92 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.77 mm/N |
| Moving mass (Mms) | : 11.5 g |
| Mech. Q factor (Qms) | : 1.96 |
| Electr. Q factor (Qes) | : 0.7 |
| Total Q factor (Qts) | : 0.52 |
| Equivalent volume (Vas) | : 48 l |
| DC resistance (Re) | : 7.2 Ohm |
| Force factor (BxL) | : 6.10 Tm |
| Voice coil induct. (Le) | : 0.3 mH |
| Voice coil diameter | : $\tilde{\sim}$ 25.5 mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : \pm 1.6 mm |
| Eff. cone area (Sd) | : 210 cm ² |
| Magnet weight | : 500 g |
| Magnet diameter | : $\tilde{\sim}$ 100 mm |
| Mounting cutout | : $\tilde{\sim}$ 188 mm |
| Mounting depth | : 72 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\tilde{\sim}$ 205 mm x 80 mm |
| Outside diameter | : $\tilde{\sim}$ 205 mm |
| Width | : $\tilde{\sim}$ 205 mm |



| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 80 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 1.35 kg |
| Packing unit | : 1 |
| Type of speaker | : 8" |