


## EDL-80DT - Dante PA Loudspeaker



Active 2-way flush-mount ceiling speaker,  
with integrated DANTE(r) module.

- 30 W amplifier
- 20 cm (8") bass speaker with glass fibre cone, 2.5 cm (1") dome tweeter
- Decoding: 16/24/32 bits
- Sampling rates: 44.1/48/88.2/96 kHz
- Power supply via PoE (Power over Ethernet)
- For a ceiling thickness up to 4 cm
- Mounting cutout: Ø 240 mm
- Mounting depth: 225 mm incl. space requirement for network connection

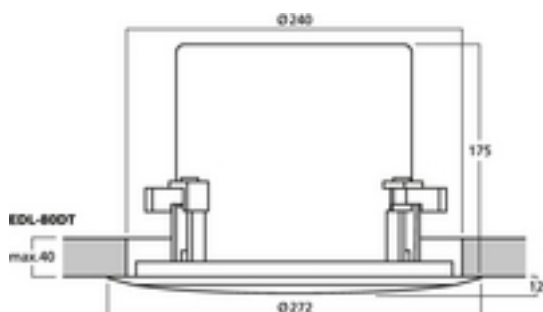

System requirements Dante(r): Windows\* 7/8.1/10 or MacOS 10.9.5/10.10.5/10.11

The brand Dante(r) as well as the Dante(r) software which may have been integrated into these products are licenced by Audinate Pty Ltd.

## Tekniset tiedot:

Active/passive	: active
Transmission method	: Dante <sup>(r)</sup>
Total output power	: -
Power rating (RMS)	: 30 W
Total power rating	: -
Power rating (RMS)	: -
Impedance	: -
Frequency range	: 100-20,000 Hz
THD	: -
S/N ratio	: -
Input signal	: DANTE <sup>(r)</sup>
System	: 2-way
Full range speaker	: -
Bass speaker	: 1 x 20 cm
Midrange speaker	: -
Tweeter	: 1 x 2.5 cm
Number of speakers	: 2
Speaker size	: 20 cm (8")
Sensitivity	: 93 dB/W/m
Max. rated SPL	: 105 dB
Radiation angle, horizontal	: 100°
Radiation angle, vertical	: 100°
Features	: -
Housing material	: metal, plastic
Colour	: white
Mounting device	: ceiling suspension
Protected against ball rebound	: -
Protection class	: -
Admiss. ambient temp.	: 0-40 °C
Power supply	: PoE via RJ45
Dimensions	: ~ 272 mm x 187 mm
Width	: ~ 272 mm
Height	: -
Depth	: 187 mm
Weight	: 2.7 kg



---

Inputs	: RJ45
Outputs	: -
Replacement voice coil	: -
Other features	: -
Accessories	: -