


EDL-620EN - PA Ceiling Speaker

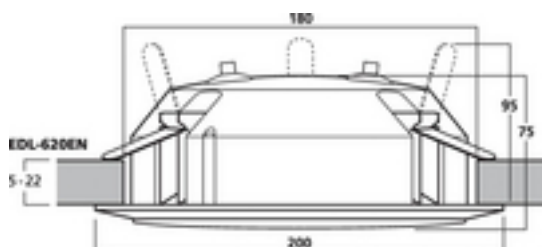

PA ceiling speakers,
with EN 54-24 certification.

- 100 V line technique with 3 power taps
- Full range speaker with optimised voice reproduction
- Plastic cover with low mounting depth
- For a ceiling thickness from 5 to 22 mm
- Quick installation
- Robust metal basket and protective grille

Tekniset tiedot:

| | |
|---|--------------------------------|
| Impedance (Z) | : - |
| Transmission method | : 100 V |
| Frequency range | : 120-15,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 20/10/5 W |
| Peak music power output (MAX) | : - |
| Sensitivity | : 93 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : - |
| Mounting cutout | : \varnothing 180 mm |
| Mounting depth | : 60 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : \varnothing 200 mm x 70 mm |
| Outside diameter | : \varnothing 200 mm |
| Width | : \varnothing 200 mm |



| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 70 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 1.1 kg |
| Packing unit | : 1 |
| Type of speaker | : 165 |