
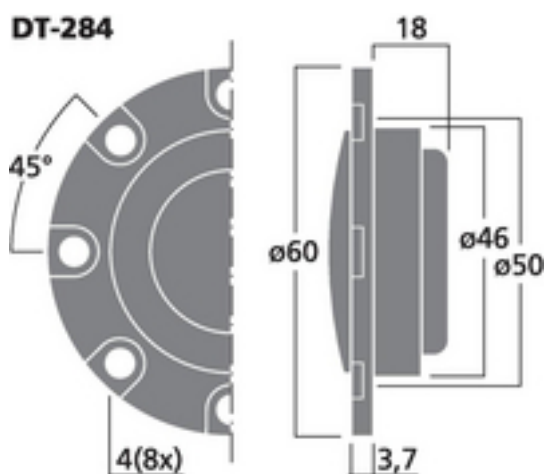


## DT-284 - Tweeter Pair

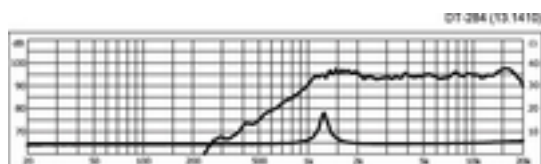

The Tweeter for Perfect Car Hi-fi Applications:

DT-284 "The Dome". This tweeter provides everything expected from a top class tweeter: a sensationally linear frequency response, high level reserves, low crossover frequency, compact size and a distinct and appealing design!

Pair of dome tweeters, 60 W, 4 Ohm

- 28 mm silk cone
- Aluminium voice coil
- Neodymium magnet



- High-quality ABS housing with 8-hole screw connection
- Perfect sound of extra low distortion
- Highest level stability
- Exceptionally long excursion

A crossover network is required for operation! Ideal: CDN-2X

## Tekniset tiedot:

|   |                        |
|---|------------------------|
| Impedance (Z)                             | : 4 Ohm                |
| Transmission method                       | : -                    |
| Frequency range                           | : fx-20,000 Hz         |
| Resonant frequency (fs)                   | : 1,300 Hz             |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : 2,000 Hz             |
| Power rating (RMS)                        | : 60 W                 |
| Peak music power output (MAX)             | : 100 W                |
| Sensitivity                               | : 91 dB/W/m            |
| Max. rated SPL                            | : -                    |
| Max. voltage                              | : -                    |
| Radiation angle, horizontal               | : -                    |
| Radiation angle, vertical                 | : -                    |
| Suspension compl. (Cms)                   | : -                    |
| Moving mass (Mms)                         | : -                    |
| Mech. Q factor (Qms)                      | : -                    |
| Electr. Q factor (Qes)                    | : -                    |
| Total Q factor (Qts)                      | : -                    |
| Equivalent volume (Vas)                   | : -                    |
| DC resistance (Re)                        | : -                    |
| Force factor (BxL)                        | : -                    |
| Voice coil induct. (Le)                   | : -                    |
| Voice coil diameter                       | : $\tilde{\sim}$ 28 mm |
| Voice coil former                         | : -                    |
| Linear excursion (X <sub>MAX</sub> )      | : -                    |
| Eff. cone area (Sd)                       | : -                    |
| Magnet weight                             | : -                    |
| Magnet diameter                           | : $\tilde{\sim}$ 46 mm |
| Mounting cutout                           | : $\tilde{\sim}$ 50 mm |
| Mounting depth                            | : 18 mm                |
| Mounting hole diameter                    | : -                    |
| Hole spacing X-axis                       | : -                    |
| Hole spacing Y-axis                       | : -                    |
| Dimensions                                | : $\tilde{\sim}$ 60 mm |
| Outside diameter                          | : $\tilde{\sim}$ 60 mm |
| Width                                     | : $\tilde{\sim}$ 60 mm |



|                       |           |
|-----------------------|-----------|
| Height                | : -       |
| Depth                 | : 21.7 mm |
| Protective class      | : -       |
| Admiss. ambient temp. | : 0-40 °C |
| Weight                | : 0.18 kg |
| Packing unit          | : 2       |
| Type of speaker       | : -       |