


SPE-140/WS - Loudspeaker

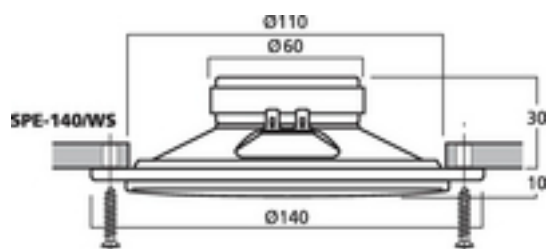

Flush-mount speaker, 10 W

- Dual cone for a full range reproduction
- Slimline design
- Fixed metal grille
- Suitable for indoor announcements and background music

Tekniset tiedot:

Impedance (Z)	: 4 Ohm
Transmission method	: -
Frequency range	: 120-12,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 10 W
Peak music power output (MAX)	: 20 W
Sensitivity	: 87 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\tilde{\text{A}} \sim 110 \text{ mm}$
Mounting depth	: 30 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\text{A}} \sim 140 \text{ mm} \hat{\text{A}} \times \hat{\text{A}} 40 \text{ mm}$
Outside diameter	: $\tilde{\text{A}} \sim 140 \text{ mm}$
Width	: $\tilde{\text{A}} \sim 140 \text{ mm}$



Height	: -
Depth	: 40 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 311 g
Packing unit	: 1
Type of speaker	: 130