


## MCE-401 - Electret Mike Capsule

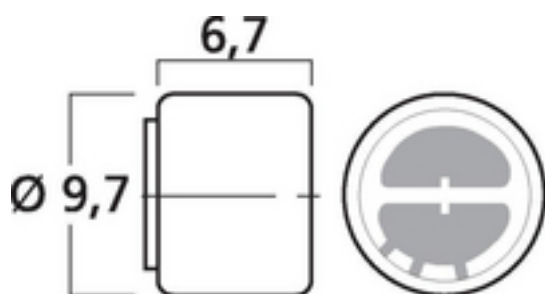

High-quality electret microphone cartridge,  
(omnidirectional polar pattern), with 150 mm shielded cable and insulated, tin-plated cable ends.  
An external 1-2.2 kOhm resistor is required for AF decoupling.

## Tekniset tiedot:

Polar pattern	: omnidir.
Frequency range	: 50-16,000 Hz
Sensitivity	: 7.9 mV/Pa
Max. sound pressure	: -
Output impedance	: 2.2 kOhm
S/N ratio	: ? 58 dB
Coupling capacitor	: 0.1-4.7 $\mu$ F
Suitable for	: -
Admiss. ambient temp.	: 0-40 °C
Power supply	: DC 1.5-10 V/0.5 mA
Dimensions	: $\sim$ 9.7 mm x 6.7 mm
Weight	: 2 g