


# PA-4040MPX - Pre-Amplifier

482 mm  
19"

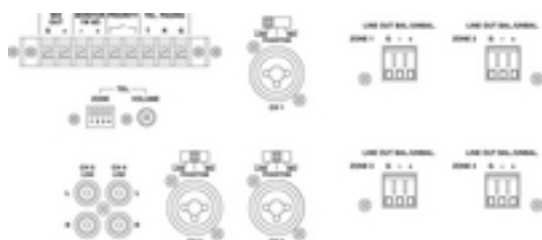

4-zone mixer,  
for general multi-room PA applications.

- 4 zones with user-defined routing of all input channels
- 3 inputs microphone/line via comb. jacks
- 2 inputs line stereo via RCA jacks
- Each input channel with gain control, 2-way tone control and zone routing switch
- Microphone inputs with +15 V phantom power, to be switched on as required
- Priority function for channel 1, switchable
- Independent paging input, can be routed to each zone
- 4 zone outputs, can be adjusted individually
- Connection for monitor speaker
- Level control via VU meters for zone and monitor
- Adjustable headphone output
- Mains operation or 24 V emergency power operation

## Tekniset tiedot:

Peak output power	: -
Power rating	: -
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: -
Power rating at 8 Ohm	: -
Power rating at 16 Ohm	: -
Power rating at 100 V	: -
Power rating with 4 Ohm	: -
bridged operation	
Power rating with 8 Ohm	: -
bridged operation	
Output impedance	: -
Channels	: 5
Zones	: 4
Inputs	: 5 mV/4 kOhm, 100 mV/10 kOhm (mic/line), 100 mV/30 kOhm (line)
Attenuation factor	: -
Frequency range	: 50-17,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: $\pm 10$ dB/100 Hz
Equalizer midrange	: -
Equalizer treble	: $\pm 10$ dB/10 kHz
S/N ratio	: ? 65 dB (mic), ? 75 dB (line)
Crosstalk attenuation	: -
THD	: < 1%
Mains voltage	: $\sim$ 230 V
Mains frequency	: 50 Hz
Power consumption, operation	: 20 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: DC 24 V
Power supply (possible alternative)	: DC 600 mA
Admiss. ambient temp.	: 0-40 °C
Width	: 482 mm

Height  
Depth

: 133 mm  
: 220 mm



Rack spaces, RS	: 3
Weight	: 4.5 kg
Connections	: 3 x combo 6.3 mm/XLR (mic/line), 2 x RCA L/R (line), 4 x plug-in screw terminal (zones), screw terminal (monitor speakers), screw terminal (mix out), screw terminal (paging), screw terminal (priority)