


PA-6020Z - PA Amplifier

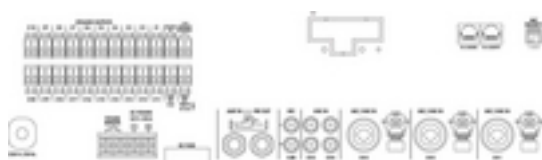

20-zone mono PA mixing amplifier

- 1 x 600 W
- 20 zones, can be controlled individually
- 3 inputs microphone/line via comb. jacks
- 2 inputs stereo line via RCA jacks
- Chime, continuous sound and wailing sound, automatic mute, 2-tone chime or 4-tone chime (selectable)
- Bass, treble and master controls, LEDs for indicating signal/clip, regulated fan
- Insertions for various functions are available at option
- 15 V phantom power for electret microphones
- Connection for up to 3 zone paging microphones PA-2400RC
- Connection for up to 3 push-to-talk microphones PA-4300PTT
- Alarm announcement with insertion PA-1120DMT (available at option)
- Mains operation and 24 V emergency power operation
- Removable mounting brackets

Tekniset tiedot:

| | |
|--|--|
| Peak output power | : - |
| Power rating | : 600 W |
| Power rating at 2 Ohm | : - |
| Power rating at 4 Ohm | : - |
| Power rating at 8 Ohm | : - |
| Power rating at 16 Ohm | : - |
| Power rating at 100 V | : 600 W |
| Power rating with 4 Ohm bridged operation | : - |
| Power rating with 8 Ohm bridged operation | : - |
| Output impedance | : - |
| Channels | : 5 |
| Zones | : 20 |
| Inputs | : 2.5 mV/5 kOhm, 0.3 V/5 kOhm (mic/line 1-3), 0.3 V/15 kOhm (line 4-5), 0.775 V/100 kOhm |
| Attenuation factor | : - |
| Frequency range | : 55-16,000 Hz |
| Crossover network | : - |
| Crossover frequency | : - |
| Integrated limiter | : - |
| Equalizer bass | : ± 10 dB/100 Hz |
| Equalizer midrange | : - |
| Equalizer treble | : ± 10 dB/10 kHz |
| S/N ratio | : ? 70 dB (mic), ? 80 dB (line) |
| Crosstalk attenuation | : - |
| THD | : < 1% |
| Phantom power | : 15 V |
| Mains voltage | : \sim 230 V |
| Mains frequency | : 50 Hz |
| Power consumption, operation | : 1,700 VA |
| Power consumption, standby | : - |
| Standby current | : - |
| Operating voltage (possible alternative) | : DC 24 V |
| Power supply (possible alternative) | : DC 50 A |

Admiss. ambient temp.

: 0-40 °C

Width

: 482 mm

Height

: 133 mm





| | |
|-----------------|---|
| Depth | : 352 mm |
| Rack spaces, RS | : 3 |
| Weight | : 21 kg |
| Connections | : 3 x comb. 6.3 mm/XLR (mic/line), 2 x RCA L/R (line), 1 x 6.3 mm jack (preamplifier input), 1 x RJ45 (push-to-talk mic), 1 x RJ45 (zone paging mic), screw terminals (speakers), 1 x RCA L/R (record output) 1 x 6.3 mm jack (preampli |