


NE-8FDYC6B - CAT6 Chassis Jack

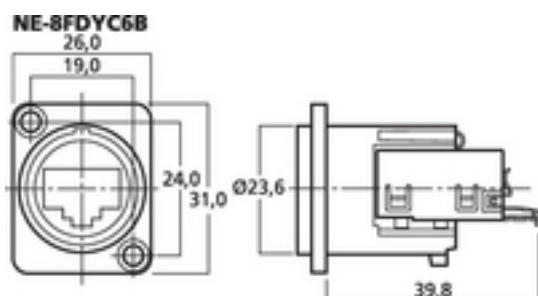

EtherCon panel jacks,
for industrial use and Ethernet cabling on stage.

- Complies with Cat. 6 requirements according to TIA/EIA and ISO/IEC, data rate up to 10 Gbps
- Weatherproof
- RJ45 jack with tool-free and gas-tight insulation displacement connectors (IDC)
- Shielded system
- Earthing jumper with selectable grounding option
- D series standard

NE-8FDYC6 = nickel-plated

NE-8FDYC6B = black

Tekniset tiedot:

| | |
|------------------------------|--|
| Description | : panel jack |
| Type | : NEUTRIK EtherCon |
| Quantity | : 1 |
| Features | : insulation displacement contacts (IDC), selectable grounding option, Cat. 6 |
| Colour/colour coding | : black |
| Power rating | : - |
| Insulating resistance | : - |
| Dielectric strength | : - |
| Certification | : - |
| Pole number | : - |
| Cable inlet | : - |
| Suitable cable cross section | : - |
| Connection | : RJ45 jack |
| Strain relief | : - |
| Cable bending protection | : - |
| Stereo | : - |
| Mono | : - |
| Switches | : - |
| Material | : - |
| Central fixing | : - |
| Contact type | : - |
| No. of contacts | : - |
| Contact width | : - |
| Contact distance | : - |
| Admiss. ambient temp. | : -10 °C to +60 °C |
| Dimensions | : 26 x 31 x 39.8 |
| Diameter | : - |
| Length | : - |
| Weight | : 31 g |
| Other features | : D series |