


EDL-80DT - Dante PA Loudspeaker



Active 2-way flush-mount ceiling speaker,
with integrated DANTE(r) module.

- 30 W amplifier
- 20 cm (8") bass speaker with glass fibre cone, 2.5 cm (1") dome tweeter
- Decoding: 16/24/32 bits
- Sampling rates: 44.1/48/88.2/96 kHz
- Power supply via PoE (Power over Ethernet)
- For a ceiling thickness up to 4 cm
- Mounting cutout: Ø 240 mm
- Mounting depth: 225 mm incl. space requirement for network connection

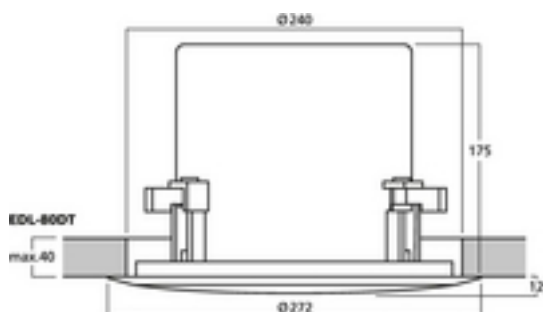

System requirements Dante(r): Windows* 7/8.1/10 or MacOS 10.9.5/10.10.5/10.11

The brand Dante(r) as well as the Dante(r) software which may have been integrated into these products are licenced by Audinate Pty Ltd.

Tekniset tiedot:

| | |
|--------------------------------|------------------------|
| Active/passive | : active |
| Transmission method | : Dante ^(r) |
| Total output power | : - |
| Power rating (RMS) | : 30 W |
| Total power rating | : - |
| Power rating (RMS) | : - |
| Impedance | : - |
| Frequency range | : 100-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : DANTE ^(r) |
| System | : 2-way |
| Full range speaker | : - |
| Bass speaker | : 1 x 20 cm |
| Midrange speaker | : - |
| Tweeter | : 1 x 2.5 cm |
| Number of speakers | : 2 |
| Speaker size | : 20 cm (8") |
| Sensitivity | : 93 dB/W/m |
| Max. rated SPL | : 105 dB |
| Radiation angle, horizontal | : 100° |
| Radiation angle, vertical | : 100° |
| Features | : - |
| Housing material | : metal, plastic |
| Colour | : white |
| Mounting device | : ceiling suspension |
| Protected against ball rebound | : - |
| Protection class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Power supply | : PoE via RJ45 |
| Dimensions | : ~ 272 mm x 187 mm |
| Width | : ~ 272 mm |
| Height | : - |
| Depth | : 187 mm |
| Weight | : 2.7 kg |



| | |
|------------------------|--------|
| Inputs | : RJ45 |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |