


## NE-8FDYC6B - CAT6 Chassis Jack

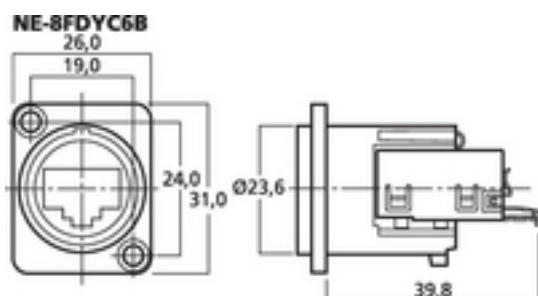

EtherCon panel jacks,  
for industrial use and Ethernet cabling on stage.

- Complies with Cat. 6 requirements according to TIA/EIA and ISO/IEC, data rate up to 10 Gbps
- Weatherproof
- RJ45 jack with tool-free and gas-tight insulation displacement connectors (IDC)
- Shielded system
- Earthing jumper with selectable grounding option
- D series standard

NE-8FDYC6 = nickel-plated

NE-8FDYC6B = black

## Tekniset tiedot:

|                              |  |
|------------------------------|--|
| Description                  | : panel jack   |
| Type                         | : NEUTRIK EtherCon   |
| Quantity                     | : 1  |
| Features                     | : insulation displacement contacts (IDC), selectable<br>grounding option, Cat. 6 |
| Colour/colour coding         | : black  |
| Power rating                 | : -  |
| Insulating resistance        | : -  |
| Dielectric strength          | : -  |
| Certification                | : -  |
| Pole number                  | : -  |
| Cable inlet                  | : -  |
| Suitable cable cross section | : -  |
| Connection                   | : RJ45 jack  |
| Strain relief                | : -  |
| Cable bending protection     | : -  |
| Stereo                       | : -  |
| Mono                         | : -  |
| Switches                     | : -  |
| Material                     | : -  |
| Central fixing               | : -  |
| Contact type                 | : -  |
| No. of contacts              | : -  |
| Contact width                | : -  |
| Contact distance             | : -  |
| Admiss. ambient temp.        | : -10 °C to +60 °C   |
| Dimensions                   | : 26 x 31 x 39.8   |
| Diameter                     | : -  |
| Length                       | : -  |
| Weight                       | : 31 g   |
| Other features               | : D series   |