


NAC-3MPHC - PowerCon Chassis Jack

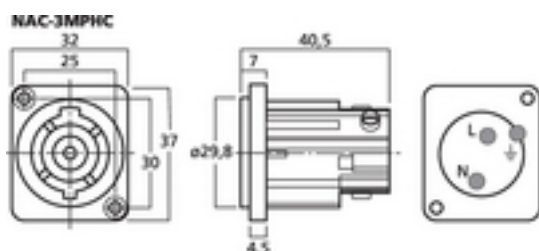

NEUTRIK POWERCON panel jack

- For mains connection with a high power rating of up to ∿ 250 V/32 A
- Screw connections for ground, phase and neutral connector
- For cable cores: 2.5-6 mm²

Tekniset tiedot:

| | |
|------------------------------|---|
| Description | : panel jack |
| Type | : NEUTRIK POWERCON |
| Quantity | : 1 |
| Features | : latching device, cable inlet with self-adjusting clamps |
| Colour/colour coding | : black |
| Power rating | : ∿Â 250 V/32 A |
| Insulating resistance | : ? 10Â GOhm |
| Dielectric strength | : - |
| Certification | : - |
| Pole number | : - |
| Cable inlet | : - |
| Suitable cable cross section | : - |
| Connection | : NEUTRIK-POWERCON/cable cores 2.5-6Â mm ² |
| Strain relief | : - |
| Cable bending protection | : - |
| Stereo | : - |
| Mono | : - |
| Switches | : - |
| Material | : metal |
| Central fixing | : - |
| Contact type | : - |
| No. of contacts | : - |
| Contact width | : - |
| Contact distance | : - |
| Admiss. ambient temp. | : -25 °C to +70 °C |
| Dimensions | : 32 x 37 x 40.5 mm |
| Diameter | : - |
| Length | : - |
| Weight | : 26 g |
| Other features | : - |