


ESP-232/SW - PA Speaker Cabinet

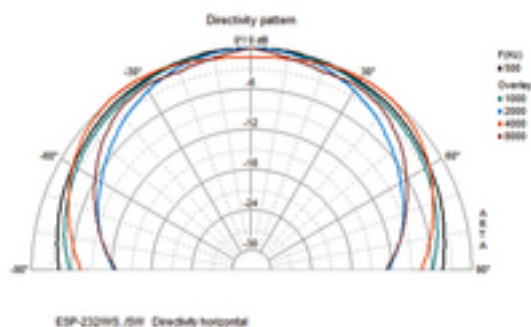

Weatherproof 2-way PA wall-mount speaker system

- 100 V PA speaker system with an excellent sound
- 13 cm polypropylene bass-midrange speaker and dome tweeter
- 4 power taps
- Power selector switch with 8 Ohm operating position
- Excellent efficiency for a speaker of such a compact size
- Available in black (SW) or white (WS) plastic with respectively lacquered aluminium grille, modern design
- Supplied with matching metal wall brackets

Tekniset tiedot:

| | |
|--------------------------------|--|
| Active/passive | : passive |
| Transmission method | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : 50 W |
| Power rating (RMS) | : 30/20/10/5 W (100 V) 25 W (8 Ohm) |
| Impedance | : 8 Ohm |
| Frequency range | : 75-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 2 |
| Speaker size | : 13 cm |
| Sensitivity | : 89 dB |
| Max. rated SPL | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Features | : - |
| Housing material | : plastic |
| Colour | : black |
| Mounting device | : - |
| Protected against ball rebound | : - |
| Protection class | : IP55 |
| Admiss. ambient temp. | : 0-40 °C |
| Power supply | : - |
| Dimensions | : 160 x 260 x 180 mm |
| Width | : 160 mm |
| Height | : 260 mm |
| Depth | : 180 mm |
| Weight | : 2.3 kg |



| | |
|------------------------|------------------------------|
| Inputs | : spring-load. speaker term. |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |