


## SPE-8U - Loudspeaker

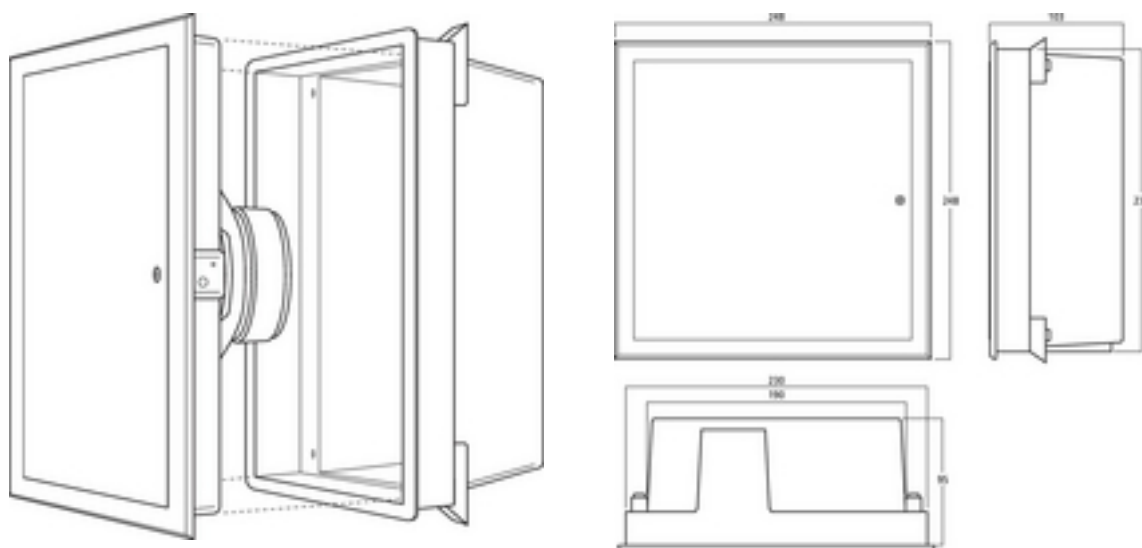

Hi-fi wall and ceiling speaker for flush mounting, 8 Ohm

- High-quality 2-way coaxial speaker system with excellent sound characteristics
- 20 cm (8") bass speaker with glass fibre cone, 24 mm (1") dome tweeter with titanium cone
- Plastic tray for flush mounting in walls or solid ceilings
- Required hole in wall: approx. 242 x 242 x 100 mm
- Metal front grille with plastic frame

## Tekniset tiedot:

Impedance (Z)	: 8 Ohm
Transmission method	: -
Frequency range	: 70-20,000 Hz
Resonant frequency (fs)	: 60 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 30 W
Peak music power output (MAX)	: 60 W
Sensitivity	: 89 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: 242 x 242 mm
Mounting depth	: 100 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 248 x 248 x 100 mm
Outside diameter	: -
Width	: 248 mm



Height	: 248 mm
Depth	: 100 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 1.6 kg
Packing unit	: 1
Type of speaker	: 200