
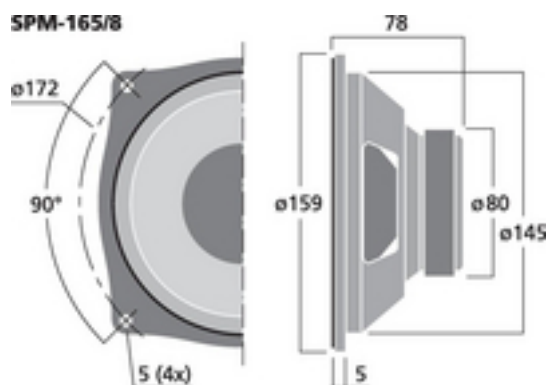


SPM-165/8 - HiFi Woofer

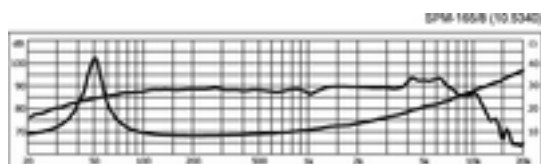

Hi-fi bass-midrange speaker, 60 W, 8 Ohm

- Excellent replacement speaker of the same quality as from the original equipment manufacturer
- Coated low-resonance paper cone
- Long-term stable rubber surround
- To be used preferably in closed or transmission line cabinets

Klang+Ton 01/2013

"What a great idea. The Cheap Trick 264 (with SPM-165/8 & DTM-104/8) wants to show that it is possible to actually provide great music at an attractive price ... and with any kind of music programme. It provides a



reproduction of a comprehensive musical spectrum which is always a pleasure to listen to. With reliable material and a little care during assembly, you already get an all-round speaker which is absolutely suitable for practical operation."

Tekniset tiedot:

| | |
|---|---------------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : f3-5,000 Hz |
| Resonant frequency (fs) | : 49 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 60 W |
| Peak music power output (MAX) | : 150 W |
| Sensitivity | : 88 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 1.0 mm/N |
| Moving mass (Mms) | : 10.3 g |
| Mech. Q factor (Qms) | : 2.7 |
| Electr. Q factor (Qes) | : 0.67 |
| Total Q factor (Qts) | : 0.55 |
| Equivalent volume (Vas) | : 33 l |
| DC resistance (Re) | : 7.2 Ohm |
| Force factor (BxL) | : 5.80 Tm |
| Voice coil induct. (Le) | : 0.6 mH |
| Voice coil diameter | : $\tilde{\sim}$ 25.5 mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : \pm 3 mm |
| Eff. cone area (Sd) | : 140 cm ² |
| Magnet weight | : 380 g |
| Magnet diameter | : $\tilde{\sim}$ 80 mm |
| Mounting cutout | : $\tilde{\sim}$ 145 mm |
| Mounting depth | : 73 mm |
| Mounting hole diameter | : $\tilde{\sim}$ 172 mm |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\tilde{\sim}$ 159 mm x 78 mm |
| Outside diameter | : $\tilde{\sim}$ 159 mm |
| Width | : $\tilde{\sim}$ 159 mm |



| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 78 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.97 kg |
| Packing unit | : 1 |
| Type of speaker | : 6.5" |