


## DSP-1 - Speaker Protection Modul

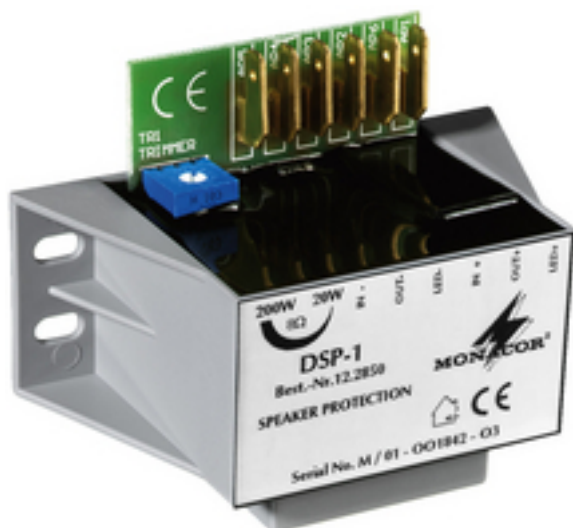

### Mono speaker protection module

- To protect midrange speakers and tweeters of all impedances in case of overload by excessive level peaks
- Max. admissible power can be adjusted between 20 and 200 W
- Subsequent mounting into existing systems without any problems
- Safe speaker protection for satellites and other small full range speakers in the entire audio range from 20-20,000 Hz
- Audio quality not affected below threshold
- Module is automatically reset after eliminating the power peaks

## Tekniset tiedot:

|                       |  |
|-----------------------|--|
| Description           | : speaker protection module                              |
| Nominal value         | : -  |
| Type                  | : mono   |
| Colour                | : -  |
| Material              | : metal  |
| Suitable for          | : protecting midrange speakers/tweeters against overload |
| Power supply          | : -  |
| Admiss. ambient temp. | : 0-40 °C  |
| Dimensions            | : -  |
| Length                | : -  |
| Mounting dimensions   | : -  |
| Weight                | : 120 g  |
| Connections           | : -  |
| Other features        | : -  |
| Packing unit          | : 1  |