


UHC-30 - Horn Speaker

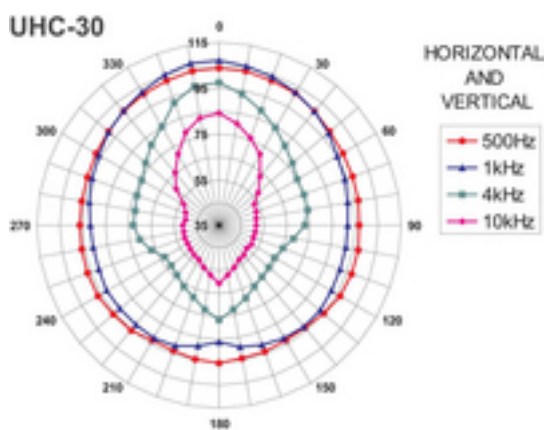

Weatherproof horn speaker

- 8 Ohm speaker system
- IP66 tested, protected against powerful water jets
- For open-air events, industrial use, in workshops
- Mounting bracket and screws made of stainless steel

Tekniset tiedot:

| | |
|--------------------------------|------------------------------------|
| Active/passive | : passive |
| Transmission method | : - |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : 40 W |
| Power rating (RMS) | : 20 W |
| Impedance | : 8 Ohm |
| Frequency range | : 230-10,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 1 |
| Speaker size | : - |
| Sensitivity | : 108 dB/W/m |
| Max. rated SPL | : - |
| Radiation angle, horizontal | : 75° |
| Radiation angle, vertical | : 75° |
| Features | : - |
| Housing material | : aluminium |
| Colour | : dark grey |
| Mounting device | : stainless steel mounting bracket |
| Protected against ball rebound | : - |
| Protection class | : IP66 |
| Admiss. ambient temp. | : -20 °C to +50 °C |
| Power supply | : - |
| Dimensions | : 310 mm x 285 mm |
| Width | : 310 mm |
| Height | : - |
| Depth | : 285 mm |
| Weight | : 1.89 kg |



| | |
|------------------------|----------------|
| Inputs | : - |
| Outputs | : - |
| Replacement voice coil | : IT-230/VC |
| Other features | : weatherproof |
| Accessories | : - |