


NAUSBW - USB Chassis Connector

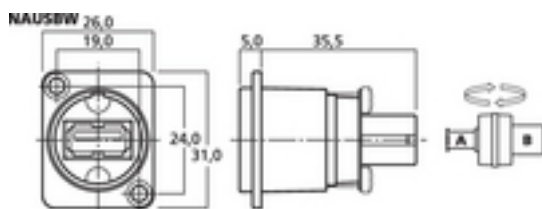

USB feed-through panel jack, nickel-plated,
for integrating computer-based devices into audio and video systems as well as for audio networks like
M-LAN, Cobra Net, etc.

- Reversible adapter for feed-through direction: Type-A/Type-B or Type-B/Type-A
- Ground connection between USB jack and body
- D series standard

Tekniset tiedot:

| | |
|------------------------------|----------------------------|
| Description | : panel jack |
| Type | : NEUTRIK USB feed-through |
| Quantity | : 1 |
| Features | : USB Type-A/USB Type-B |
| Colour/colour coding | : nickel-plated |
| Power rating | : - |
| Insulating resistance | : - |
| Dielectric strength | : - |
| Certification | : - |
| Pole number | : - |
| Cable inlet | : - |
| Suitable cable cross section | : - |
| Connection | : 2 x USB |
| Strain relief | : - |
| Cable bending protection | : - |
| Stereo | : - |
| Mono | : - |
| Switches | : - |
| Material | : - |
| Central fixing | : - |
| Contact type | : - |
| No. of contacts | : - |
| Contact width | : - |
| Contact distance | : - |
| Admiss. ambient temp. | : -25 °C to +85 °C |
| Dimensions | : 26 x 31 x 40.5 mm |
| Diameter | : - |
| Length | : - |
| Weight | : 30 g |
| Other features | : reversible insert |