
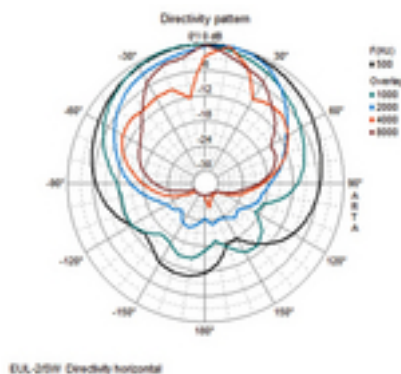


EUL-2/SW - PA Loudspeaker

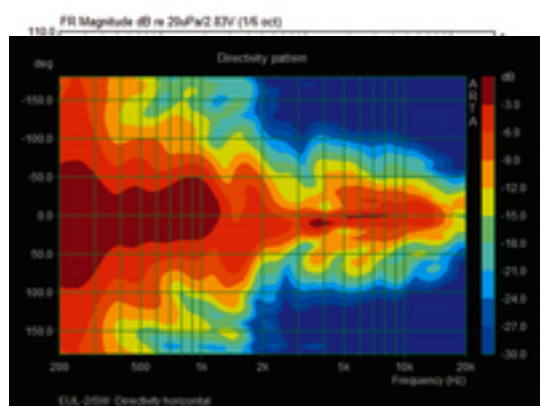

This series of speaker systems including subwoofer from MONACOR sets standards in the modern PA technology:

high-quality lacquered cabinets of a perfect design, lightweight but robust and of high power capability, with an amazing sound and a high efficiency, the EUL-2... with professional 100 V technology. Real PA speaker systems for versatile applications at a very attractive price.

PA speaker system in 100 V line technique

- High-quality cabinet with durable PU coating
- 20 cm (2 x 8") double bass speaker of high power capability and a dyn. 25 mm (1") horn tweeter
- Well-balanced and dynamic sound for speech and music applications

- SPEAKON connection, rotary switch for power selection, stand sleeve
- A subwoofer support is useful for bass reproductions of high requirements (e.g. with EUL-2SUB/SW)
- This speaker can be integrated into any existing or new 100 V system by simply connecting it in parallel, as long as the amplifier features the respective power reserves

Matching adapter piece for speaker system PAST-28/SW is available at option.

Tekniset tiedot:

| | |
|--------------------------------|----------------------|
| Active/passive | : passive |
| Transmission method | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : - |
| Power rating (RMS) | : 50/37.5/25/12.5 W |
| Impedance | : - |
| Frequency range | : 70-19,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : 2-way |
| Full range speaker | : - |
| Bass speaker | : 2 x 20 cm (8") |
| Midrange speaker | : - |
| Tweeter | : 25 mm (1") horn |
| Number of speakers | : 3 |
| Speaker size | : 20 cm (8") |
| Sensitivity | : 95 dB/W/m |
| Max. rated SPL | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Features | : - |
| Housing material | : birch plywood/wood |
| Colour | : black |
| Mounting device | : stand sleeve |
| Protected against ball rebound | : - |
| Protection class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Power supply | : - |
| Dimensions | : 320 x 485 x 250 mm |
| Width | : 320 mm |
| Height | : 485 mm |
| Depth | : 250 mm |
| Weight | : 8.7 kg |



| | |
|------------------------|---------------|
| Inputs | : 1 x SPEAKON |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |