


## EDL-36TW - PA Loudspeaker

100V

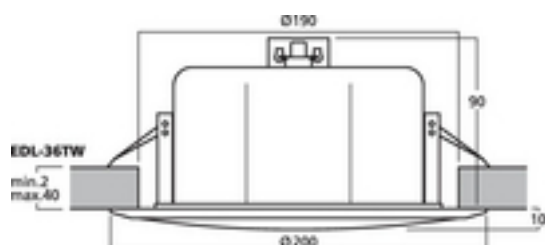

PA ceiling speaker,  
for a high safety level in case of a fire.

- 100 V line technique
- Additional integrated tweeter
- Fire protection cover
- Metal housing with fitted ceramic terminal
- Thermal fuse: 1 A/150 °C, for disconnecting a faulty speaker in case of a short circuit (fire), so that the function of one speaker line is maintained
- 3-step power selector switch
- Earth connection
- Glass fibre insulated supply line with high-strength cable gland
- Quick-mounting facility
- For a ceiling thickness from 2 to 40 mm

## Tekniset tiedot:

|   |                                 |
|---|---------------------------------|
| Impedance (Z)                             | : -                             |
| Transmission method                       | : 100 V                         |
| Frequency range                           | : 150-20,000 Hz                 |
| Resonant frequency (fs)                   | : -                             |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                             |
| Power rating (RMS)                        | : 10/5/2.5 W                    |
| Peak music power output (MAX)             | : -                             |
| Sensitivity                               | : 95 dB/W/m                     |
| Max. rated SPL                            | : -                             |
| Max. voltage                              | : -                             |
| Radiation angle, horizontal               | : -                             |
| Radiation angle, vertical                 | : -                             |
| Suspension compl. (Cms)                   | : -                             |
| Moving mass (Mms)                         | : -                             |
| Mech. Q factor (Qms)                      | : -                             |
| Electr. Q factor (Qes)                    | : -                             |
| Total Q factor (Qts)                      | : -                             |
| Equivalent volume (Vas)                   | : -                             |
| DC resistance (Re)                        | : -                             |
| Force factor (BxL)                        | : -                             |
| Voice coil induct. (Le)                   | : -                             |
| Voice coil diameter                       | : -                             |
| Voice coil former                         | : -                             |
| Linear excursion (X <sub>MAX</sub> )      | : -                             |
| Eff. cone area (Sd)                       | : -                             |
| Magnet weight                             | : -                             |
| Magnet diameter                           | : -                             |
| Mounting cutout                           | : $\varnothing$ 190 mm          |
| Mounting depth                            | : 90 mm                         |
| Mounting hole diameter                    | : -                             |
| Hole spacing X-axis                       | : -                             |
| Hole spacing Y-axis                       | : -                             |
| Dimensions                                | : $\varnothing$ 200 mm x 100 mm |
| Outside diameter                          | : $\varnothing$ 200 mm          |
| Width                                     | : $\varnothing$ 200 mm          |



|                       |           |
|-----------------------|-----------|
| Height                | : -       |
| Depth                 | : 100 mm  |
| Protective class      | : -       |
| Admiss. ambient temp. | : 0-40 °C |
| Weight                | : 1.45 kg |
| Packing unit          | : 1       |
| Type of speaker       | : 165     |