


SP-626/8 - PA Fullrange Speaker

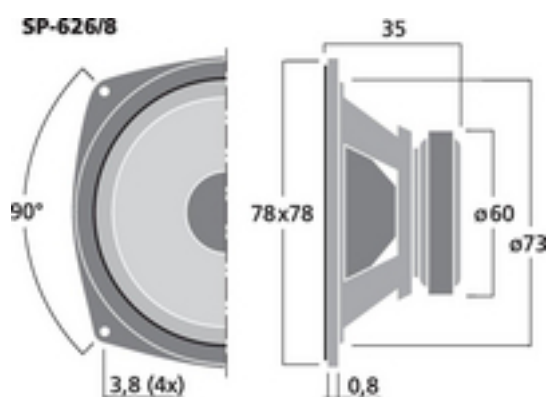

Universal full range speaker, 2 W, 8 Ohm

- For any PA application
- Particularly suitable for multiple arrangements in column speakers

Tekniset tiedot:

| | |
|---|-------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : f3-18,000 Hz |
| Resonant frequency (fs) | : 200 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 2 W |
| Peak music power output (MAX) | : 3 W |
| Sensitivity | : - |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : 79 g |
| Magnet diameter | : Å~ 60 mm |
| Mounting cutout | : Å~ 73 mm |
| Mounting depth | : 34.2 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : 78 x 78 x 35 mm |
| Outside diameter | : - |
| Width | : 78 mm |



| | |
|-----------------------|------------|
| Height | : 78 mm |
| Depth | : 35 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.225 kg |
| Packing unit | : 1 |
| Type of speaker | : 3 |