


## ESP-232/SW - PA Speaker Cabinet

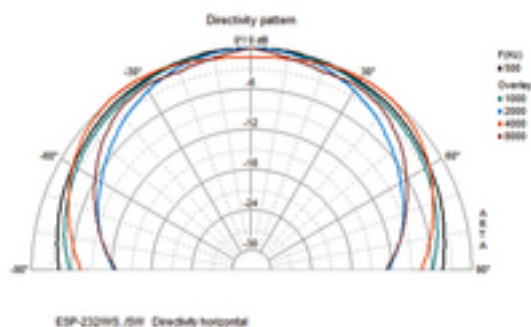

### Weatherproof 2-way PA wall-mount speaker system

- 100 V PA speaker system with an excellent sound
- 13 cm polypropylene bass-midrange speaker and dome tweeter
- 4 power taps
- Power selector switch with 8 Ohm operating position
- Excellent efficiency for a speaker of such a compact size
- Available in black (SW) or white (WS) plastic with respectively lacquered aluminium grille, modern design
- Supplied with matching metal wall brackets

## Tekniset tiedot:

|                                |  |
|--------------------------------|--|
| Active/passive                 | : passive                              |
| Transmission method            | : 100 V                                |
| Total output power             | : -                                    |
| Power rating (RMS)             | : -                                    |
| Total power rating             | : 50 W                                 |
| Power rating (RMS)             | : 30/20/10/5 W (100 V)<br>25 W (8 Ohm) |
| Impedance                      | : 8 Ohm                                |
| Frequency range                | : 75-20,000 Hz                         |
| THD                            | : -                                    |
| S/N ratio                      | : -                                    |
| Input signal                   | : -                                    |
| System                         | : -                                    |
| Full range speaker             | : -                                    |
| Bass speaker                   | : -                                    |
| Midrange speaker               | : -                                    |
| Tweeter                        | : -                                    |
| Number of speakers             | : 2                                    |
| Speaker size                   | : 13 cm                                |
| Sensitivity                    | : 89 dB                                |
| Max. rated SPL                 | : -                                    |
| Radiation angle, horizontal    | : -                                    |
| Radiation angle, vertical      | : -                                    |
| Features                       | : -                                    |
| Housing material               | : plastic                              |
| Colour                         | : black                                |
| Mounting device                | : -                                    |
| Protected against ball rebound | : -                                    |
| Protection class               | : IP55                                 |
| Admiss. ambient temp.          | : 0-40 °C                              |
| Power supply                   | : -                                    |
| Dimensions                     | : 160 x 260 x 180 mm                   |
| Width                          | : 160 mm                               |
| Height                         | : 260 mm                               |
| Depth                          | : 180 mm                               |
| Weight                         | : 2.3 kg                               |



|                        |                              |
|------------------------|------------------------------|
| Inputs                 | : spring-load. speaker term. |
| Outputs                | : -                          |
| Replacement voice coil | : -                          |
| Other features         | : -                          |
| Accessories            | : -                          |