


HT-88 - Horn Speaker

FERRO
FLUID

100
W_{MAX}

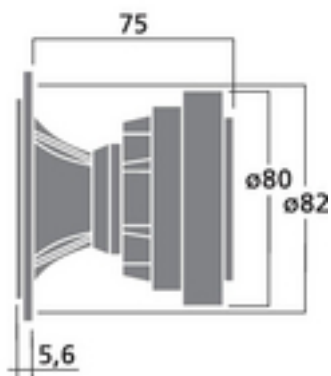

PA horn tweeter, 50 W, 8 Ohm

- Very linear and wide bandwidth radiation
- High efficiency
- Ferrofluid-cooled and ferrofluid-vaporised

Tekniset tiedot:

| | |
|---|---|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : fx-18 kHz |
| Resonant frequency (fs) | : 2.5 kHz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : 4 kHz |
| Power rating (RMS) | : 50 W |
| Peak music power output (MAX) | : 100 W |
| Sensitivity | : 99 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : $\tilde{\text{A}} \sim 25 \text{ mm}$ |
| Voice coil former | : - |
| Linear excursion (X_{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : $\tilde{\text{A}} \sim 80 \text{ mm}$ |
| Mounting cutout | : $\tilde{\text{A}} \sim 82 \text{ mm}$ |
| Mounting depth | : 75 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : 67 mm |
| Hole spacing Y-axis | : 67 mm |
| Dimensions | : 87 x 87 x 75 mm |
| Outside diameter | : - |
| Width | : 87 mm |

| | |
|-----------------------|-----------|
| Height | : 87 mm |
| Depth | : 75 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.67 kg |
| Packing unit | : 1 |
| Type of speaker | : - |