


SPH-60X - HiFi Full Range

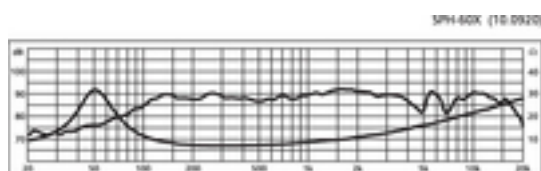

Full range speaker, 30 W, 8 Ohm

- Drilled pole core
- Very good frequency response linearity also in the high frequency range
- For general applications
- Speaker from the successful building concepts CT193 and CT194 of the magazine Klang+Ton

Klang+Ton 02/2019

“We highly recommend this excellent standard full range speaker with a set of parameters very well suited for practical applications.”



(Speaker building concept Cheap Trick 302)

Tekniset tiedot:

Impedance (Z)	: 8 Ohm
Transmission method	: -
Frequency range	: f3-20,000 Hz
Resonant frequency (fs)	: 60 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 30 W
Peak music power output (MAX)	: 60 W
Sensitivity	: 89 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: 1.19 mm/N
Moving mass (Mms)	: 5.9 g
Mech. Q factor (Qms)	: 2.17
Electr. Q factor (Qes)	: 0.53
Total Q factor (Qts)	: 0.42
Equivalent volume (Vas)	: 9 l
DC resistance (Re)	: 6.2 Ohm
Force factor (BxL)	: 5.10 Tm
Voice coil induct. (Le)	: 0.4 mH
Voice coil diameter	: $\tilde{\text{A}}$ 25.5 mm
Voice coil former	: aluminium
Linear excursion (X _{MAX})	: \pm 1.3 mm
Eff. cone area (Sd)	: 80 cm ²
Magnet weight	: 370 g
Magnet diameter	: $\tilde{\text{A}}$ 100 mm
Mounting cutout	: $\tilde{\text{A}}$ 122 mm
Mounting depth	: 70 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 130 x 130 x 71 mm
Outside diameter	: -
Width	: 130 mm



Height	: 130 mm
Depth	: 71 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 1.07 kg
Packing unit	: 1
Type of speaker	: 5"