
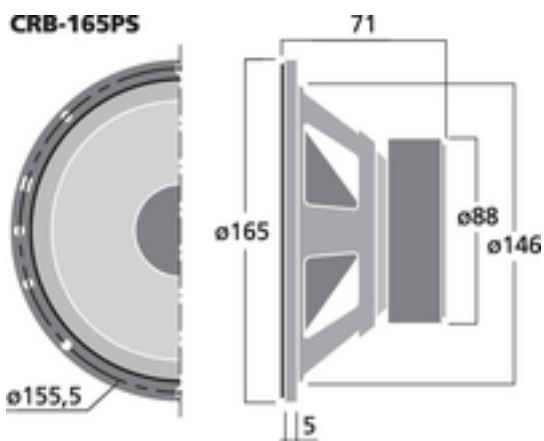


## CRB-165PS - Car Speaker Pair

PAAR  
PAIR

70  
W<sub>RMS</sub>

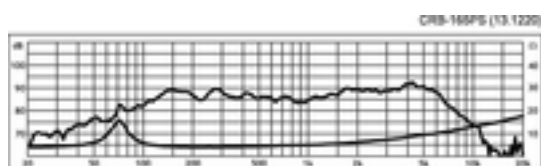

Kick bass speakers which perfectly combine a modern finish with the application of approved and optimised materials.

The design of the polypropylene cones are of a special structure, with high damping and moisture-proof material also provide a better stability.

Pair of car hi-fi bass-midrange speakers, 35 W, 4 Ohm

- Bass-midrange speaker and powerful kick bass driver
- Polypropylene cone of special design, especially resistant to pulsed peaks
- Very rigid dust cap
- Basket with textured coating

- Gold-plated connections
- Frequency range: 50-4,500 Hz
- Ideal for combination with additional tweeters
- Mounting dimensions: Ø 144 x 70 mm
- Outside dimensions: Ø 165 mm x 71 mm
- Type 165

## Tekniset tiedot:

Impedance (Z)	: 4 Ohm
Transmission method	: -
Frequency range	: f3-4,500 Hz
Resonant frequency (fs)	: 65 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 35 W
Peak music power output (MAX)	: 70 W
Sensitivity	: 89 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: 0.32 mm/N
Moving mass (Mms)	: 14.5 g
Mech. Q factor (Qms)	: 4.54
Electr. Q factor (Qes)	: 1.25
Total Q factor (Qts)	: 0.99
Equivalent volume (Vas)	: 11 l
DC resistance (Re)	: 3.6 Ohm
Force factor (BxL)	: 4.20 Tm
Voice coil induct. (Le)	: 0.6 mH
Voice coil diameter	: $\varnothing$ 25 mm
Voice coil former	: aluminium
Linear excursion (X <sub>MAX</sub> )	: $\pm$ 3 mm
Eff. cone area (Sd)	: 137 cm <sup>2</sup>
Magnet weight	: 280 g
Magnet diameter	: -
Mounting cutout	: $\varnothing$ 146 mm
Mounting depth	: 70 mm
Mounting hole diameter	: $\varnothing$ 155.5 mm
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\varnothing$ 165 mm x 71 mm
Outside diameter	: $\varnothing$ 165 mm
Width	: $\varnothing$ 165 mm

Height	: -
Depth	: 71 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.95 kg
Packing unit	: 2
Type of speaker	: 165