
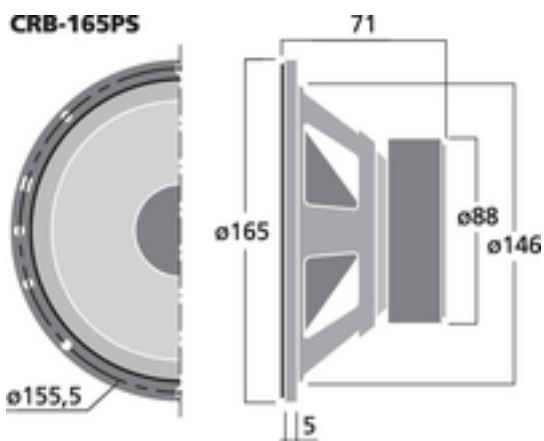


## CRB-165PS - Car Speaker Pair

PAAR  
PAIR

70  
W<sub>RMS</sub>

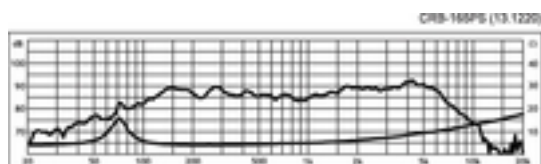

Kick bass speakers which perfectly combine a modern finish with the application of approved and optimised materials.

The design of the polypropylene cones are of a special structure, with high damping and moisture-proof material also provide a better stability.

Pair of car hi-fi bass-midrange speakers, 35 W, 4 Ohm

- Bass-midrange speaker and powerful kick bass driver
- Polypropylene cone of special design, especially resistant to pulsed peaks
- Very rigid dust cap
- Basket with textured coating

- Gold-plated connections
- Frequency range: 50-4,500 Hz
- Ideal for combination with additional tweeters
- Mounting dimensions: Ø 144 x 70 mm
- Outside dimensions: Ø 165 mm x 71 mm
- Type 165

## Tekniset tiedot:

|   |                                |
|---|--------------------------------|
| Impedance (Z)                             | : 4 Ohm                        |
| Transmission method                       | : -                            |
| Frequency range                           | : f3-4,500 Hz                  |
| Resonant frequency (fs)                   | : 65 Hz                        |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                            |
| Power rating (RMS)                        | : 35 W                         |
| Peak music power output (MAX)             | : 70 W                         |
| Sensitivity                               | : 89 dB/W/m                    |
| Max. rated SPL                            | : -                            |
| Max. voltage                              | : -                            |
| Radiation angle, horizontal               | : -                            |
| Radiation angle, vertical                 | : -                            |
| Suspension compl. (Cms)                   | : 0.32 mm/N                    |
| Moving mass (Mms)                         | : 14.5 g                       |
| Mech. Q factor (Qms)                      | : 4.54                         |
| Electr. Q factor (Qes)                    | : 1.25                         |
| Total Q factor (Qts)                      | : 0.99                         |
| Equivalent volume (Vas)                   | : 11 l                         |
| DC resistance (Re)                        | : 3.6 Ohm                      |
| Force factor (BxL)                        | : 4.20 Tm                      |
| Voice coil induct. (Le)                   | : 0.6 mH                       |
| Voice coil diameter                       | : $\varnothing$ 25 mm          |
| Voice coil former                         | : aluminium                    |
| Linear excursion (X <sub>MAX</sub> )      | : $\pm$ 3 mm                   |
| Eff. cone area (Sd)                       | : 137 cm <sup>2</sup>          |
| Magnet weight                             | : 280 g                        |
| Magnet diameter                           | : -                            |
| Mounting cutout                           | : $\varnothing$ 146 mm         |
| Mounting depth                            | : 70 mm                        |
| Mounting hole diameter                    | : $\varnothing$ 155.5 mm       |
| Hole spacing X-axis                       | : -                            |
| Hole spacing Y-axis                       | : -                            |
| Dimensions                                | : $\varnothing$ 165 mm x 71 mm |
| Outside diameter                          | : $\varnothing$ 165 mm         |
| Width                                     | : $\varnothing$ 165 mm         |



|                       |           |
|-----------------------|-----------|
| Height                | : -       |
| Depth                 | : 71 mm   |
| Protective class      | : -       |
| Admiss. ambient temp. | : 0-40 °C |
| Weight                | : 0.95 kg |
| Packing unit          | : 2       |
| Type of speaker       | : 165     |