
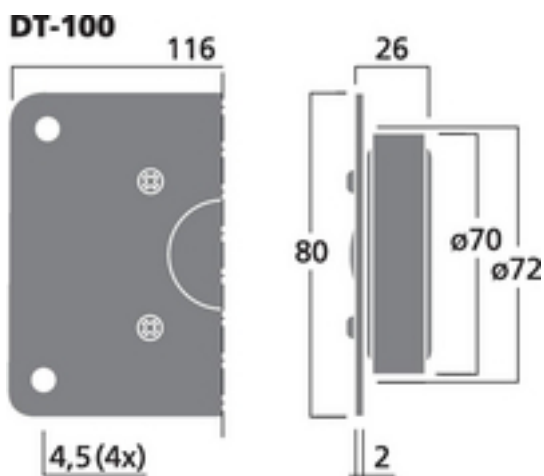


## DT-100 - HiFi Dome Tweeter

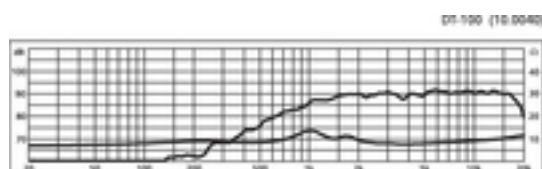

Hi-fi dome tweeter, 30 W, 8 Ohm

- Soft dome of high power capability, classic rectangular size
- Ferrofluid
- Good linearity with extra brilliant characteristics
- Reproduction rich in detail

## Tekniset tiedot:

|   |                        |
|---|------------------------|
| Impedance (Z)                             | : 8 Ohm                |
| Transmission method                       | : -                    |
| Frequency range                           | : fx-20,000 Hz         |
| Resonant frequency (fs)                   | : 1,500 Hz             |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : 2,500 Hz             |
| Power rating (RMS)                        | : 30 W                 |
| Peak music power output (MAX)             | : 60 W                 |
| Sensitivity                               | : 92 dB/W/m            |
| Max. rated SPL                            | : -                    |
| Max. voltage                              | : -                    |
| Radiation angle, horizontal               | : -                    |
| Radiation angle, vertical                 | : -                    |
| Suspension compl. (Cms)                   | : -                    |
| Moving mass (Mms)                         | : -                    |
| Mech. Q factor (Qms)                      | : -                    |
| Electr. Q factor (Qes)                    | : -                    |
| Total Q factor (Qts)                      | : -                    |
| Equivalent volume (Vas)                   | : -                    |
| DC resistance (Re)                        | : -                    |
| Force factor (BxL)                        | : -                    |
| Voice coil induct. (Le)                   | : -                    |
| Voice coil diameter                       | : $\tilde{\sim}$ 25 mm |
| Voice coil former                         | : -                    |
| Linear excursion (X <sub>MAX</sub> )      | : -                    |
| Eff. cone area (Sd)                       | : -                    |
| Magnet weight                             | : -                    |
| Magnet diameter                           | : $\tilde{\sim}$ 70 mm |
| Mounting cutout                           | : $\tilde{\sim}$ 72 mm |
| Mounting depth                            | : 26 mm                |
| Mounting hole diameter                    | : -                    |
| Hole spacing X-axis                       | : -                    |
| Hole spacing Y-axis                       | : -                    |
| Dimensions                                | : 116 x 80 x 26 mm     |
| Outside diameter                          | : -                    |
| Width                                     | : 116 mm               |



|                       |            |
|-----------------------|------------|
| Height                | : 80 mm    |
| Depth                 | : 26 mm    |
| Protective class      | : -        |
| Admiss. ambient temp. | : 0-40 °C  |
| Weight                | : 0.525 kg |
| Packing unit          | : 1        |
| Type of speaker       | : -        |