
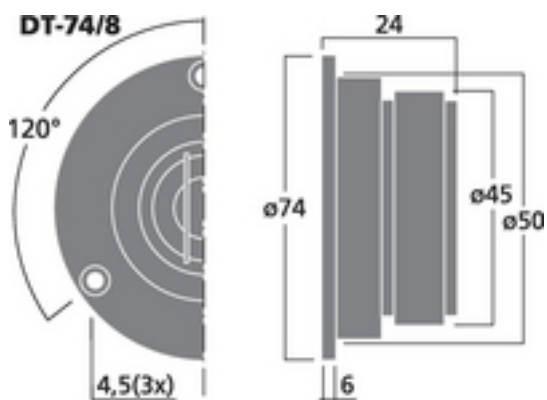


## DT-74/8 - HiFi Dome Tweeter

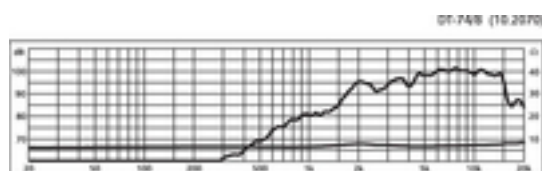

Miniature hi-fi tweeter, 15 W, 8 Ohm

- 11 mm dome with diffuser
- Extra high efficiency
- Brilliant sound, similar to some ribbon tweeters
- For hi-fi and Public Address

## Tekniset tiedot:

|   |                             |
|---|-----------------------------|
| Impedance (Z)                             | : 8 Ohm                     |
| Transmission method                       | : -                         |
| Frequency range                           | : fx-18,000 Hz              |
| Resonant frequency (fs)                   | : 2,000 Hz                  |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : 5,000 Hz                  |
| Power rating (RMS)                        | : 15 W                      |
| Peak music power output (MAX)             | : 30 W                      |
| Sensitivity                               | : 98 dB/W/m                 |
| Max. rated SPL                            | : -                         |
| Max. voltage                              | : -                         |
| Radiation angle, horizontal               | : -                         |
| Radiation angle, vertical                 | : -                         |
| Suspension compl. (Cms)                   | : -                         |
| Moving mass (Mms)                         | : -                         |
| Mech. Q factor (Qms)                      | : -                         |
| Electr. Q factor (Qes)                    | : -                         |
| Total Q factor (Qts)                      | : -                         |
| Equivalent volume (Vas)                   | : -                         |
| DC resistance (Re)                        | : -                         |
| Force factor (BxL)                        | : -                         |
| Voice coil induct. (Le)                   | : -                         |
| Voice coil diameter                       | : $\tilde{\sim}$ 11 mm      |
| Voice coil former                         | : -                         |
| Linear excursion ( $X_{MAX}$ )            | : -                         |
| Eff. cone area (Sd)                       | : -                         |
| Magnet weight                             | : -                         |
| Magnet diameter                           | : $\tilde{\sim}$ 45 mm      |
| Mounting cutout                           | : $\tilde{\sim}$ 50 mm      |
| Mounting depth                            | : 24 mm                     |
| Mounting hole diameter                    | : -                         |
| Hole spacing X-axis                       | : -                         |
| Hole spacing Y-axis                       | : -                         |
| Dimensions                                | : $\tilde{\sim}$ 74 x 24 mm |
| Outside diameter                          | : $\tilde{\sim}$ 74 mm      |
| Width                                     | : $\tilde{\sim}$ 74 mm      |

|                       |           |
|-----------------------|-----------|
| Height                | : -       |
| Depth                 | : 24 mm   |
| Protective class      | : -       |
| Admiss. ambient temp. | : 0-40 °C |
| Weight                | : 0.12 kg |
| Packing unit          | : 1       |
| Type of speaker       | : -       |