


## SPE-15F/WS - Marine Loudspeaker

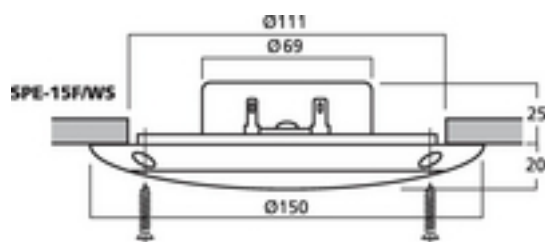

Pair of weatherproof flush-mount PA speakers, 15 W,  
with UV-stabilised plastic housing, super slimline design.  
Versatile use for PA, car hi-fi, terrace, boat, swimming pool areas.

- Weatherproof polypropylene speaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- Low stray magnetic field
- Supplied with stainless mounting accessories and connection cable

## Tekniset tiedot:

|   |  |
|---|--|
| Impedance (Z)                             | : 4 Ohm  |
| Transmission method                       | : -  |
| Frequency range                           | : 80-16,000 Hz   |
| Resonant frequency (fs)                   | : -  |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -  |
| Power rating (RMS)                        | : 15 W   |
| Peak music power output (MAX)             | : 30 W   |
| Sensitivity                               | : 86 dB/W/m  |
| Max. rated SPL                            | : -  |
| Max. voltage                              | : -  |
| Radiation angle, horizontal               | : -  |
| Radiation angle, vertical                 | : -  |
| Suspension compl. (Cms)                   | : -  |
| Moving mass (Mms)                         | : -  |
| Mech. Q factor (Qms)                      | : -  |
| Electr. Q factor (Qes)                    | : -  |
| Total Q factor (Qts)                      | : -  |
| Equivalent volume (Vas)                   | : -  |
| DC resistance (Re)                        | : -  |
| Force factor (BxL)                        | : -  |
| Voice coil induct. (Le)                   | : -  |
| Voice coil diameter                       | : -  |
| Voice coil former                         | : -  |
| Linear excursion (X <sub>MAX</sub> )      | : -  |
| Eff. cone area (Sd)                       | : -  |
| Magnet weight                             | : 83 g   |
| Magnet diameter                           | : -  |
| Mounting cutout                           | : $\varnothing$ 111 mm                                     |
| Mounting depth                            | : 25 mm  |
| Mounting hole diameter                    | : -  |
| Hole spacing X-axis                       | : -  |
| Hole spacing Y-axis                       | : -  |
| Dimensions                                | : $\varnothing$ 150 $\varnothing$ mm x 45 $\varnothing$ mm |
| Outside diameter                          | : $\varnothing$ 150 mm                                     |
| Width                                     | : $\varnothing$ 150 mm                                     |

|                       |           |
|-----------------------|-----------|
| Height                | : -       |
| Depth                 | : 45 mm   |
| Protective class      | : IP65    |
| Admiss. ambient temp. | : 0-40 °C |
| Weight                | : 270 g   |
| Packing unit          | : 2       |
| Type of speaker       | : 130     |