


## SPE-15F/WS - Marine Loudspeaker

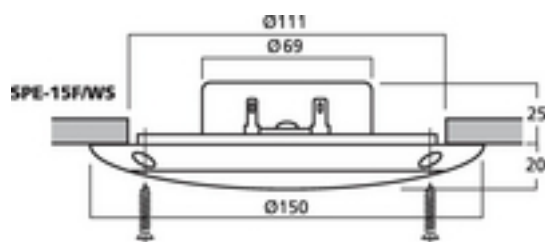

Pair of weatherproof flush-mount PA speakers, 15 W,  
with UV-stabilised plastic housing, super slimline design.  
Versatile use for PA, car hi-fi, terrace, boat, swimming pool areas.

- Weatherproof polypropylene speaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- Low stray magnetic field
- Supplied with stainless mounting accessories and connection cable

## Tekniset tiedot:

Impedance (Z)	: 4 Ohm
Transmission method	: -
Frequency range	: 80-16,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 15 W
Peak music power output (MAX)	: 30 W
Sensitivity	: 86 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: 83 g
Magnet diameter	: -
Mounting cutout	: $\tilde{\sim}$ 111 mm
Mounting depth	: 25 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\sim}$ 150 $\tilde{\sim}$ mm x 45 $\tilde{\sim}$ mm
Outside diameter	: $\tilde{\sim}$ 150 mm
Width	: $\tilde{\sim}$ 150 mm

Height	: -
Depth	: 45 mm
Protective class	: IP65
Admiss. ambient temp.	: 0-40 °C
Weight	: 270 g
Packing unit	: 2
Type of speaker	: 130