
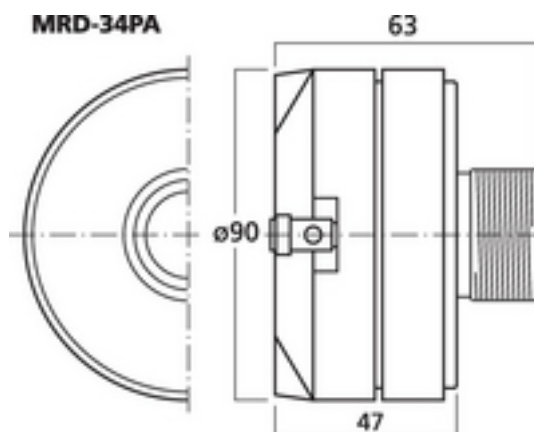


## MRD-34PA - Horn Driver

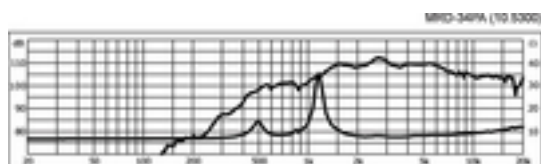

PA horn driver, 35 W, 8 Ohm

- 35 mm (1 (tm)) standard thread
- Component of the speakers PAB-108MK2, PAB-110MK2 and PAB-112MK2 as well as of the matching PAK speakers
- Matching replacement voice coil PAB-128/VC available at option
- Suitable for horns MRH-120, MRH-83, MRH-170 and MRH-80

## Tekniset tiedot:

Impedance (Z)	: 8 Ohm
Transmission method	: -
Frequency range	: fx-20,000 Hz
Resonant frequency (fs)	: 1.2 kHz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 4,000 Hz
Power rating (RMS)	: 35 W
Peak music power output (MAX)	: 70 W
Sensitivity	: 104 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: $\tilde{\sim}$ 34.5 mm
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: $\tilde{\sim}$ 87 mm
Mounting cutout	: dep. on horn
Mounting depth	: dep. on horn
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\sim}$ 90 mm x 63 mm
Outside diameter	: $\tilde{\sim}$ 90 mm
Width	: $\tilde{\sim}$ 90 mm

Height	: -
Depth	: 63 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.945 kg
Packing unit	: 1
Type of speaker	: 1"