


## WALL-05T/WS - PA Speaker Cabinet

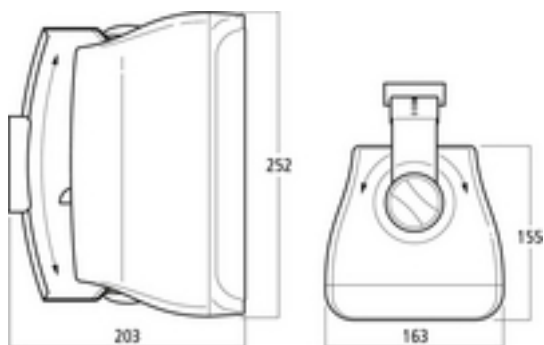

### Pair of 2-way PA speaker systems

- Wall speaker with plastic cabinet in white
- 4 power taps as well as switchable to 8 Ohm operation
- 13 cm (5") bass-midrange speaker and 12 mm (½") dome tweeter
- Suitable for outdoor applications (IP65)
- Weatherproof
- High sound quality and speech intelligibility
- Mounting bracket for pivoting and tilting
- Connecting terminal with cover

## Tekniset tiedot:

|                                |   |
|--------------------------------|---|
| Active/passive                 | : passive                               |
| Transmission method            | : 100 V                                 |
| Total output power             | : -                                     |
| Power rating (RMS)             | : -                                     |
| Total power rating             | : 80 W                                  |
| Power rating (RMS)             | : 16/8/4/2Â WÂ (100Â V) 40Â WÂ (8Â Ohm) |
| Impedance                      | : 8 Ohm                                 |
| Frequency range                | : 80-20,000 Hz                          |
| THD                            | : -                                     |
| S/N ratio                      | : -                                     |
| Input signal                   | : -                                     |
| System                         | : 2-way                                 |
| Full range speaker             | : -                                     |
| Bass speaker                   | : 13 cm (5") bass-midrange speaker      |
| Midrange speaker               | : -                                     |
| Tweeter                        | : 12 mm (½") dome tweeter               |
| Number of speakers             | : 2                                     |
| Speaker size                   | : 5"                                    |
| Sensitivity                    | : 89 dB/W/m                             |
| Max. rated SPL                 | : 104 dB                                |
| Radiation angle, horizontal    | : -                                     |
| Radiation angle, vertical      | : -                                     |
| Features                       | : -                                     |
| Housing material               | : plastic                               |
| Colour                         | : white                                 |
| Mounting device                | : mounting bracket                      |
| Protected against ball rebound | : -                                     |
| Protection class               | : IP65                                  |
| Admiss. ambient temp.          | : 0-40 °C                               |
| Power supply                   | : -                                     |
| Dimensions                     | : 163 x 252 x 203 mm (with bracket)     |
| Width                          | : 163 mm                                |
| Height                         | : 252 mm                                |
| Depth                          | : 203 mm                                |
| Weight                         | : 2.6 kg                                |



|                        |                              |
|------------------------|------------------------------|
| Inputs                 | : spring-load. speaker term. |
| Outputs                | : -                          |
| Replacement voice coil | : -                          |
| Other features         | : for pivoting and tilting   |
| Accessories            | : -                          |