


EDL-156 - PA Loudspeaker

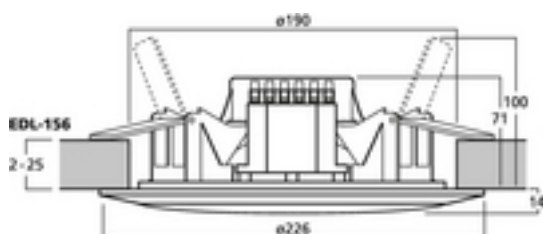

Weatherproof PA ceiling speakers,
heat-resistant up to 100 °C. For applications in saunas and swimming pool areas.

- 100 V line technique
- 2-way system with dome tweeter
- Excellent sound
- White plastic housing
- Weatherproof speaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- For a ceiling thickness from 2 to 25 mm

Tekniset tiedot:

Impedance (Z)	: -
Transmission method	: 100 V
Frequency range	: 60-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 15/10/5/2.5/1.25 W
Peak music power output (MAX)	: -
Sensitivity	: 88 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\tilde{\text{A}}$ 190 mm
Mounting depth	: 75 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\text{A}}$ 226 $\tilde{\text{A}}$ mm x 100 $\tilde{\text{A}}$ mm
Outside diameter	: $\tilde{\text{A}}$ 226 mm
Width	: $\tilde{\text{A}}$ 226 mm

Height	: -
Depth	: 100 mm
Protective class	: IP65
Admiss. ambient temp.	: -20 °C to +100 °C
Weight	: 1.1 kg
Packing unit	: 1
Type of speaker	: 180