


EDL-110/WS - PA Loudspeaker

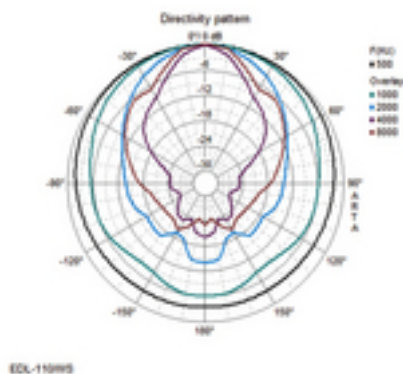

Weatherproof PA sound projector

- 100 V line technique
- 1 speaker with polypropylene cone
- Splashproof due to plastic housing with rubber seals and high-strength cable gland
- Connection cable with 3 power taps
- Movable mounting bracket and screws made of stainless steel

Tekniset tiedot:

| | |
|--------------------------------|--------------------|
| Active/passive | : passive |
| Transmission method | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : - |
| Power rating (RMS) | : 10/5/2.5 W |
| Impedance | : - |
| Frequency range | : 120-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 1 |
| Speaker size | : - |
| Sensitivity | : 94 dB/W/m |
| Max. rated SPL | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Features | : - |
| Housing material | : plastic |
| Colour | : white |
| Mounting device | : mounting bracket |
| Protected against ball rebound | : - |
| Protection class | : IP44 |
| Admiss. ambient temp. | : 0-40 °C |
| Power supply | : - |
| Dimensions | : 180 mm x 270 mm |
| Width | : 180 mm |
| Height | : - |
| Depth | : 270 mm |
| Weight | : 2 kg |



| | |
|------------------------|--------------------------------------|
| Inputs | : connection cable with 3 power taps |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |