


EDL-65TW - PA Loudspeaker

100V

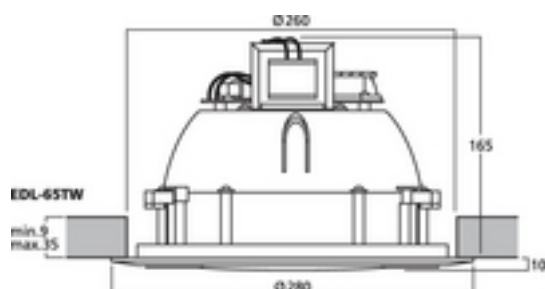

Movable PA ceiling speaker

- 100 V line technique
- High power rating with 30 W max.
- High-quality 2-way coaxial speaker system with 2-way crossover network
- Complete speaker part can be moved for optimising the sound radiation pattern indoors
- Plastic housing of superior design with metal grille
- Plastic material of ABS and self-extinguishing according to UL 94V-0
- For a ceiling thickness from 9 to 35 mm

Tekniset tiedot:

| | |
|---|--|
| Impedance (Z) | : - |
| Transmission method | : 100 V |
| Frequency range | : 50-20,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 30/15/7.5 W |
| Peak music power output (MAX) | : - |
| Sensitivity | : 91 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : - |
| Mounting cutout | : $\varnothing \sim 260$ mm |
| Mounting depth | : 165 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\varnothing \sim 280 \varnothing$ mm x 175 \varnothing mm |
| Outside diameter | : - |
| Width | : $\varnothing \sim 280$ mm |



| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 175 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 2.38 kg |
| Packing unit | : - |
| Type of speaker | : 180 |