



CRB-165PS - Car Speaker Pair

PAAR
PAIR

70
W_{RMS}

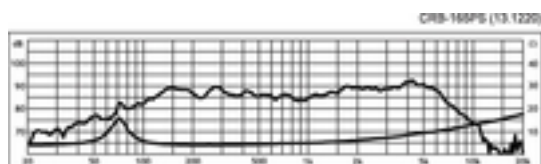

CRB-165PS

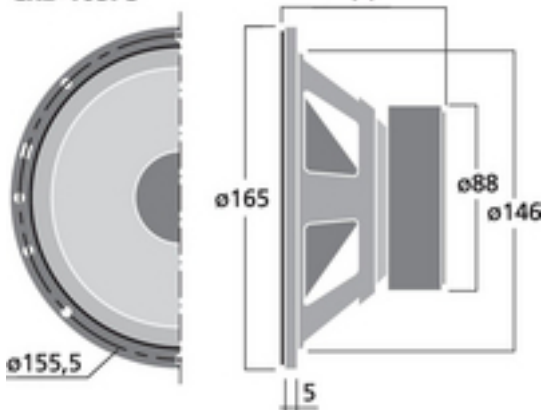

Kick bass speakers which perfectly combine a modern finish with the application of approved and optimised materials.

The design of the polypropylene cones are of a special structure, with high damping and moisture-proof material also provide a better stability.

Pair of car hi-fi bass-midrange speakers, 35 W, 4 Ohm

- Bass-midrange speaker and powerful kick bass driver
- Polypropylene cone of special design, especially resistant to pulsed peaks
- Very rigid dust cap
- Basket with textured coating

- Gold-plated connections
- Frequency range: 50-4,500 Hz
- Ideal for combination with additional tweeters
- Mounting dimensions: Ø 144 x 70 mm
- Outside dimensions: Ø 165 mm x 71 mm
- Type 165

Tekniset tiedot:

| | |
|---|---|
| Impedance (Z) | : 4 Ohm |
| Transmission method | : - |
| Frequency range | : f3-4,500 Hz |
| Resonant frequency (fs) | : 65 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 35 W |
| Peak music power output (MAX) | : 70 W |
| Sensitivity | : 89 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.32 mm/N |
| Moving mass (Mms) | : 14.5 g |
| Mech. Q factor (Qms) | : 4.54 |
| Electr. Q factor (Qes) | : 1.25 |
| Total Q factor (Qts) | : 0.99 |
| Equivalent volume (Vas) | : 11 l |
| DC resistance (Re) | : 3.6 Ohm |
| Force factor (BxL) | : 4.20 Tm |
| Voice coil induct. (Le) | : 0.6 mH |
| Voice coil diameter | : $\varnothing \sim 25$ mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : ± 3 mm |
| Eff. cone area (Sd) | : 137 cm ² |
| Magnet weight | : 280 g |
| Magnet diameter | : - |
| Mounting cutout | : $\varnothing \sim 146$ mm |
| Mounting depth | : 70 mm |
| Mounting hole diameter | : $\varnothing \sim 155.5$ mm |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\varnothing \sim \varnothing 165 \varnothing$ mm x 71 mm |
| Outside diameter | : $\varnothing \sim 165$ mm |
| Width | : $\varnothing \sim 165$ mm |

| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 71 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.95 kg |
| Packing unit | : 2 |
| Type of speaker | : 165 |