



TS-C30-700/T - PA Speaker Column

100V

EN
54



IP66

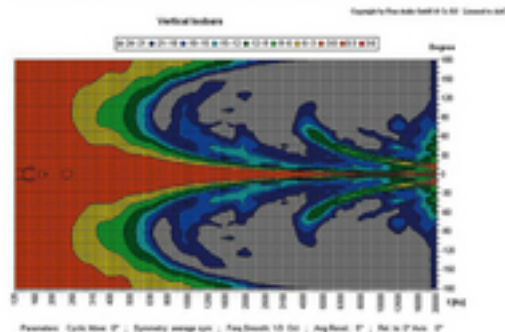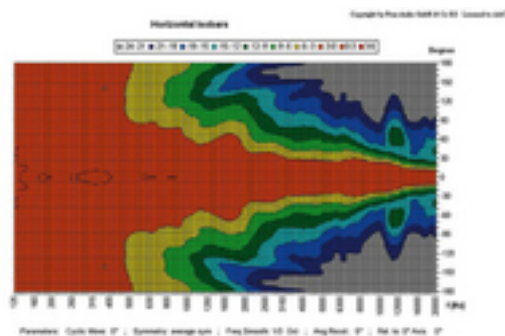

Weatherproof PA column speaker,
with EN 54-24 certification.

- 100 V line technique

-
- 6 x 7.7 cm (3") waterproof full range speaker
 - 3 power taps: 30/15/7.5 W
 - Connection via ceramic terminals with thermal fuse in the cabinet
 - 2 x PG9 cable gland
 - Robust, plastic-coated aluminium cabinet with front protective grille
 - The speaker complies with British Standard BS 5839, part 8
 - Supplied with plastic wall bracket for pivoting and tilting

Tekniset tiedot:

| | |
|--------------------------------|-----------------------------|
| Active/passive | : passive |
| Transmission method | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : - |
| Power rating (RMS) | : 30/15/7.5 W |
| Impedance | : - |
| Frequency range | : 200-17,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : 6 x 77 mm |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 6 |
| Speaker size | : - |
| Sensitivity | : 97 dB/W/m |
| Max. rated SPL | : 109 dB |
| Radiation angle, horizontal | : 160° |
| Radiation angle, vertical | : 26° |
| Features | : - |
| Housing material | : aluminium |
| Colour | : white aluminium, RAL 9006 |
| Mounting device | : wall bracket |
| Protected against ball rebound | : - |
| Protection class | : IP66 |
| Admiss. ambient temp. | : -20 °C to +90 °C |
| Power supply | : - |
| Dimensions | : 100 x 700 x 92 mm |
| Width | : 100 mm |
| Height | : 700 mm |
| Depth | : 92 mm |
| Weight | : 3.8 kg |

| | |
|------------------------|-----|
| Inputs | : - |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |