


## WALL-08T/WS - PA Speaker Cabinet

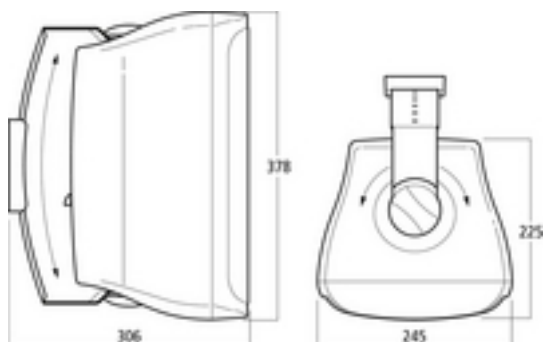

### Pair of 2-way PA speaker systems

- 100 V wall speaker with plastic cabinet in white
- 4 power taps as well as switchable to 8 Ohm operation
- 20 cm (8") bass-midrange speaker and 25 mm (1") dome tweeter
- High sound quality and speech intelligibility
- Mounting bracket for pivoting and tilting
- Connecting terminal with cover

## Tekniset tiedot:

|                                |  |
|--------------------------------|--|
| Active/passive                 | : passive                                |
| Transmission method            | : 100 V                                  |
| Total output power             | : -                                      |
| Power rating (RMS)             | : -                                      |
| Total power rating             | : 120 W                                  |
| Power rating (RMS)             | : 50/25/12.5/6.25 W (100 V) 60 W (8 Ohm) |
| Impedance                      | : 8 Ohm                                  |
| Frequency range                | : 35-20,000 Hz                           |
| THD                            | : -                                      |
| S/N ratio                      | : -                                      |
| Input signal                   | : -                                      |
| System                         | : 2-way                                  |
| Full range speaker             | : -                                      |
| Bass speaker                   | : 20 cm (8") bass-midrange speaker       |
| Midrange speaker               | : -                                      |
| Tweeter                        | : 25 mm (1") dome tweeter                |
| Number of speakers             | : 2                                      |
| Speaker size                   | : 8"                                     |
| Sensitivity                    | : 90 dB/W/m                              |
| Max. rated SPL                 | : 106 dB                                 |
| Beam angle                     | : -                                      |
| Radiation angle, horizontal    | : -                                      |
| Radiation angle, vertical      | : -                                      |
| Features                       | : -                                      |
| Housing material               | : plastic                                |
| Colour                         | : white                                  |
| Mounting device                | : mounting bracket                       |
| Protected against ball rebound | : -                                      |
| Protection class               | : IP65                                   |
| Admiss. ambient temp.          | : 0-40 °C                                |
| Power supply                   | : -                                      |
| Dimensions                     | : 245 x 378 x 306 mm (with bracket)      |
| Width                          | : 245 mm                                 |
| Height                         | : 378 mm                                 |
| Depth                          | : 306 mm                                 |



|                                |                                  |
|--------------------------------|----------------------------------|
| Weight                         | : 5 kg                           |
| Inputs                         | : spring-loaded speaker terminal |
| Outputs                        | : -                              |
| Replacement voice coil         | : -                              |
| Other features                 | : for pivoting and tilting       |
| Accessories                    | : -                              |
| Packing dimensions (W x H x L) | : -                              |
| Gross weight                   | : 13.8 kg                        |
| Net weight                     | : 11.8 kg                        |