


PA-2240 - PA Amplifier

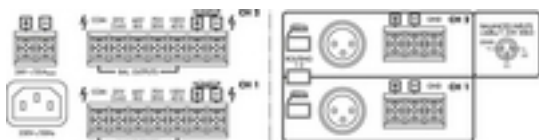

PA power amplifier

- 2 x 240 W
- Routing switch for parallel operation on both channels
- Switchable 400 Hz high-pass filter 6 dB/oct.
- Soft start
- Temperature-controlled fan
- LED indication for clip, protect, overtemperature and output level
- Mains operation or 24 V emergency power operation

Tekniset tiedot:

| | |
|--|--|
| Peak output power | : - |
| Power rating | : 480 W |
| Power rating at 2 Ohm | : - |
| Power rating at 4 Ohm | : - |
| Power rating at 8 Ohm | : 2 x 240 W |
| Power rating at 16 Ohm | : - |
| Power rating at 100 V | : 2 x 240 W |
| Power rating with 4 Ohm bridged operation | : - |
| Power rating with 8 Ohm bridged operation | : - |
| Output impedance | : 25Â V/2.6Â Ohm, 44Â V/8Â Ohm, 70Â V/20Â Ohm, 100Â V/42Â Ohm |
| Channels | : 2 |
| Zones | : - |
| Inputs | : 1.2Â V, bal. |
| Attenuation factor | : - |
| Frequency range | : 35-20,000 Hz |
| Crossover network | : - |
| Crossover frequency | : - |
| Integrated limiter | : - |
| Equalizer bass | : - |
| Equalizer midrange | : - |
| Equalizer treble | : - |
| S/N ratio | : ? 100 dBA |
| Crosstalk attenuation | : - |
| THD | : < 1% |
| Mains voltage | : ~ 230 V |
| Mains frequency | : 50 Hz |
| Power consumption, operation | : 1,300 VA |
| Power consumption, standby | : - |
| Standby current | : - |
| Operating voltage (possible alternative) | : DC 24 V |
| Power supply (possible alternative) | : DC 55 A |
| Admiss. ambient temp. | : 0-40 °C |
| Width | : 483 mm |
| Height | : 88 mm |

Depth

: 374 mm





| | |
|-----------------|---|
| Rack spaces, RS | : 2 |
| Weight | : 18 kg |
| Connections | : 2 x XLR / screw terminals (inputs) screw terminals (speakers) |