
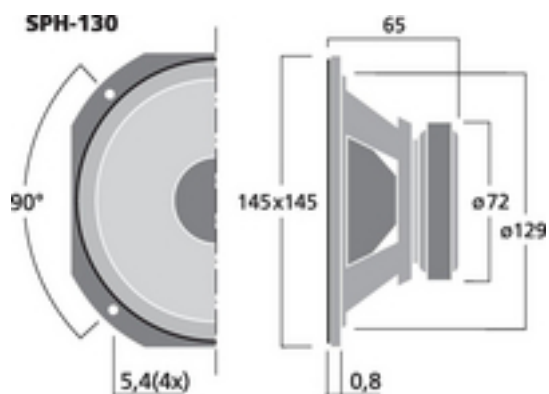


SPH-130 - HiFi Woofer

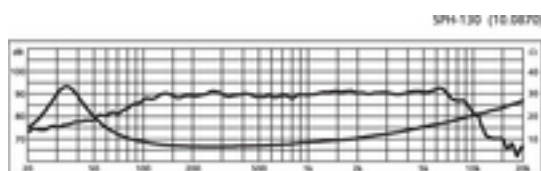

Hi-fi bass-midrange speaker, 55 W, 8 Ohm

- Paper cone with special coating
- Rubber surround with optimised profile
- Extra wide and linear radiation range, free of resonance
- Perfect components for modern 2-way combinations up to D'Appolito arrangements, also for use as a midrange speaker in multi-way speaker systems

Tekniset tiedot:

| | |
|-------------------------------------------|-------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : f3-6,000 Hz |
| Resonant frequency (fs) | : 38 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 55 W |
| Peak music power output (MAX) | : 80 W |
| Sensitivity | : 89 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 2.14 mm/N |
| Moving mass (Mms) | : 8.2 g |
| Mech. Q factor (Qms) | : 1.91 |
| Electr. Q factor (Qes) | : 0.39 |
| Total Q factor (Qts) | : 0.32 |
| Equivalent volume (Vas) | : 22 l |
| DC resistance (Re) | : 5.7 Ohm |
| Force factor (BxL) | : 5.40 Tm |
| Voice coil induct. (Le) | : 0.5 mH |
| Voice coil diameter | : $\tilde{\sim}$ 25 mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : \pm 2 mm |
| Eff. cone area (Sd) | : 80 cm ² |
| Magnet weight | : 230 g |
| Magnet diameter | : $\tilde{\sim}$ 72 mm |
| Mounting cutout | : $\tilde{\sim}$ 129 mm |
| Mounting depth | : 64.2 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : 145 x 145 x 65 mm |
| Outside diameter | : - |
| Width | : 145 mm |



| | |
|-----------------------|------------|
| Height | : 145 mm |
| Depth | : 65 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.755 kg |
| Packing unit | : 1 |
| Type of speaker | : 5.5" |