


EDL-36TW - PA Loudspeaker

100V

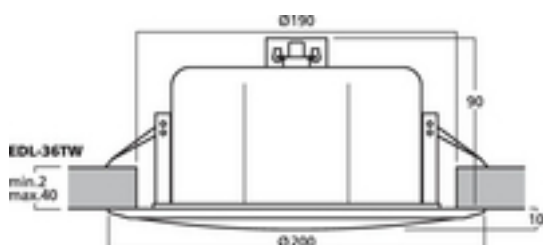

PA ceiling speaker,
for a high safety level in case of a fire.

- 100 V line technique
- Additional integrated tweeter
- Fire protection cover
- Metal housing with fitted ceramic terminal
- Thermal fuse: 1 A/150 °C, for disconnecting a faulty speaker in case of a short circuit (fire), so that the function of one speaker line is maintained
- 3-step power selector switch
- Earth connection
- Glass fibre insulated supply line with high-strength cable gland
- Quick-mounting facility
- For a ceiling thickness from 2 to 40 mm

Tekniset tiedot:

Impedance (Z)	: -
Transmission method	: 100 V
Frequency range	: 150-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 10/5/2.5 W
Peak music power output (MAX)	: -
Sensitivity	: 95 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: \varnothing 190 mm
Mounting depth	: 90 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: \varnothing 200 mm x 100 mm
Outside diameter	: \varnothing 200 mm
Width	: \varnothing 200 mm



Height	: -
Depth	: 100 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 1.45 kg
Packing unit	: 1
Type of speaker	: 165