


## SOUND-100SUB - Active Subwoofer

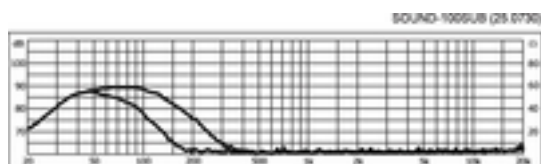

With the 2-way Active Systems and the Subwoofers of the SOUND Series, efficient speakers with a powerful sound are available in different sizes and with different features. They are all integrated into high-quality bass-reflex MDF cabinets and feature speakers with magnetic shielding. The speaker systems are ideally suited as active hi-fi speaker systems, high-end PC speakers and for small PA applications requiring a powerful sound, e.g. media presentations.

Active subwoofer system, 120 W

- Active subwoofer for adding to the active SOUND speaker systems, but also to any other compact speaker for hi-fi or home cinema applications and home recordings
- Amplifier features variable input sensitivity, a phase switch, an automatic switch-on system which can additionally be activated as well as an adjustable crossover frequency (50-150 Hz)
- High-quality bass-reflex MDF cabinet (black wood veneer look)
- 25 cm (10") bass speaker
- Volume control for the subwoofer
- Inputs via 1 x RCA L/R, RCA LFE or screw terminals for high-level L/R
- Additional outputs for mid-high range speakers, thus well-suited for connection to already existing speaker cables

## Tekniset tiedot:

Active/passive	: active
Transmission method	: -
Total output power	: -
Power rating (RMS)	: 120 W
Total power rating	: -
Power rating (RMS)	: -
Impedance	: -
Frequency range	: 35-100 Hz
THD	: -
S/N ratio	: -
Input signal	: 150Â mV/24Â kOhm (RCA L/R)55Â mV/16Â kOhm (RCA mono)2.3Â V/440Â Ohm (high IN)
System	: -
Full range speaker	: -
Bass speaker	: 25 cm (10") bass speaker
Midrange speaker	: -
Tweeter	: -
Number of speakers	: 1
Speaker size	: 25 cm (10")
Sensitivity	: 88 dB/W/m
Max. rated SPL	: 108 dB
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Features	: -
Housing material	: wood
Colour	: black
Mounting device	: -
Protected against ball rebound	: -
Protection class	: -
Admiss. ambient temp.	: 0-40 °C
Power supply	: &acd; 230Â V/50Â Hz/240Â VA
Dimensions	: 330 x 360 x 360Â mm
Width	: 330 mm
Height	: 360 mm
Depth	: 360 mm
Weight	: 13 kg



Inputs	: 1 x RCA (L/R), unbal., IN1 x RCA (mono), unbal., IN1 x screw terminal (stereo), high-levelÂ IN
Outputs	: 1 x screw terminals (stereo), high-level out
Replacement voice coil	: -
Other features	: -
Accessories	: -