
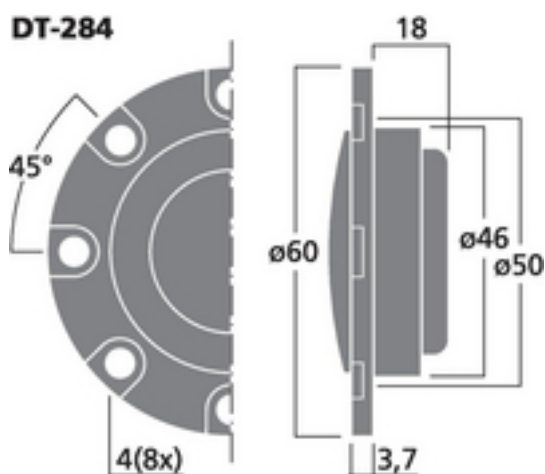


DT-284 - Tweeter Pair

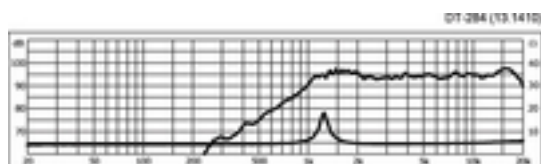

The Tweeter for Perfect Car Hi-fi Applications:

DT-284 "The Dome". This tweeter provides everything expected from a top class tweeter: a sensationally linear frequency response, high level reserves, low crossover frequency, compact size and a distinct and appealing design!

Pair of dome tweeters, 60 W, 4 Ohm

- 28 mm silk cone
- Aluminium voice coil
- Neodymium magnet



- High-quality ABS housing with 8-hole screw connection
- Perfect sound of extra low distortion
- Highest level stability
- Exceptionally long excursion

A crossover network is required for operation! Ideal: CDN-2X

Tekniset tiedot:

Impedance (Z)	: 4 Ohm
Transmission method	: -
Frequency range	: fx-20,000 Hz
Resonant frequency (fs)	: 1,300 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 2,000 Hz
Power rating (RMS)	: 60 W
Peak music power output (MAX)	: 100 W
Sensitivity	: 91 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: $\tilde{\sim}$ 28 mm
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: $\tilde{\sim}$ 46 mm
Mounting cutout	: $\tilde{\sim}$ 50 mm
Mounting depth	: 18 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\sim}$ 60 mm
Outside diameter	: $\tilde{\sim}$ 60 mm
Width	: $\tilde{\sim}$ 60 mm



Height	: -
Depth	: 21.7 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.18 kg
Packing unit	: 2
Type of speaker	: -